

LOCCDIM12

Fixture Integrated PIR and Daylight Sensor



The LOCCDIM12 is a Passive Infrared and Daylight Sensor suitable for up to 12' Mounting Heights that comes pre-installed in the fixture from the factory. It provides automatic On/Off/Dim control based on motion and/or daylight levels. This sensor detects motion by receiving infrared radiation (heat) from people, animals, or objects within its field of view. Rated for wet and cold locations, it can be installed in high bay and outdoor fixtures equipped with 0-10V drivers. Scenes, sensitivity, timers, and light levels can be adjusted with a remote programmer (SEN-PROG), sold separately.

TECHNICAL SPECIFICATIONS¹

- **Construction:** White Polycarbonate.
- **Sensing Technology:** Passive Infrared (PIR).
- **Input Voltage:** 120-277V AC.
- **Current Consumption:** >50mA.
- **Standby Power:** ≤ 0.5W.
- **Control Output:** 0-10V, 25mA.
- **Operating Temperature Range:** -20°C to +70°C (-4°F to +158°F).
- **Max Mounting Height:** 12ft (3.6m).
- **Max Sensor Range:** 60ft (18m) radius.

LISTINGS

- FCC, UL, DLC, RoHS, IP66.

FEATURES

- On/Off/Dim.
- PIR Detection with 360° Coverage Pattern, best suited for indoor or outdoor areas with a clear line of sight.
- Integrated Daylight Sensor for Daylight Harvesting.
- LED Motion Indicator.
- Integrated Dip Switches for Configuration.
- Suitable for Indoor and Outdoor use.

CONTROL SETTINGS


- **Sensitivity (Detection Area):** 25%/50%/75%/100%.
- **Hold Time:** 10s/1min/5min/15min.
- **Daylight Threshold On:** 10lux/30lux/50lux/disabled.
- **Stand-by Time:** 1min/30min/60min/+∞.
- **Stand-by Dim Level:** 0%/10%/30%/50%.




ORDERING

Part Number	Description
LOCCDIM12	PIR Occupancy and Daylight Sensor, On/Off/Dim, 12' Max Mounting Height, IP66. Fixture integrated, Factory installed.
SEN-PROG	Infrared Remote Programmer. Required to change default settings and modes of operation.


SENSOR MODULE

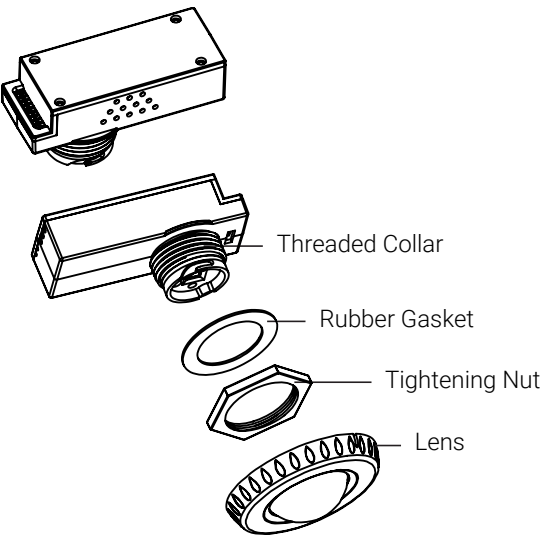

MOUNTING

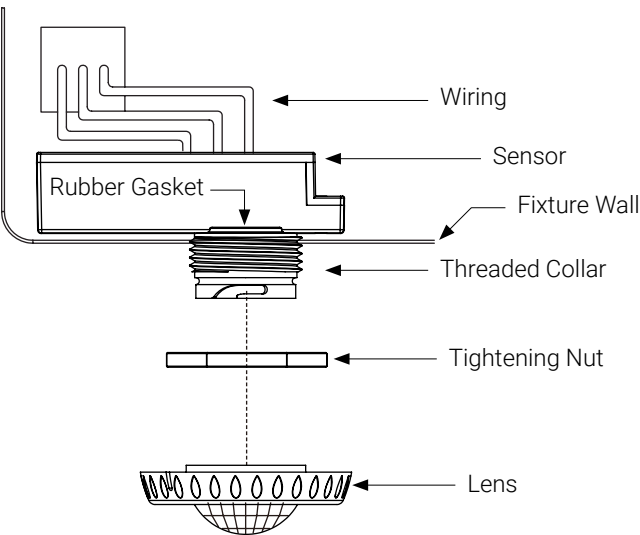

WIRING DIAGRAM

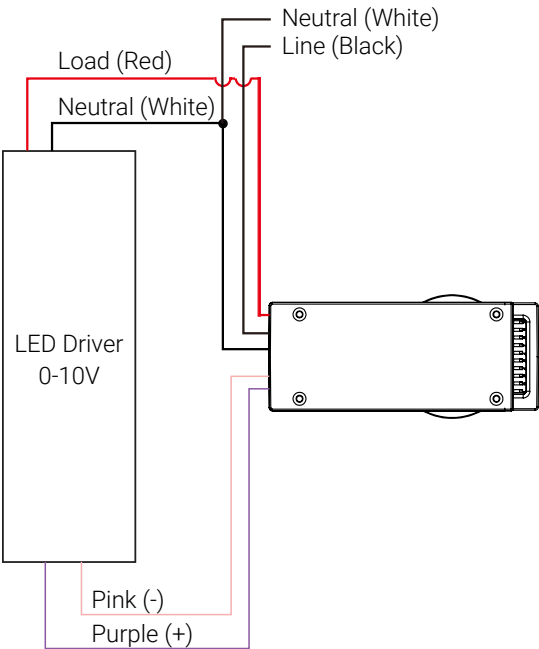

NOTE
Warm up time is 40 seconds. After the sensor connects to input power for the first time, the light will keep on for 40 seconds, then go to dimming to work normally.

SENSOR OPERATION

On/Off/Dim (Default Mode)

Factory default settings: Sensitivity: 100%, Hold time: 10s, Daylight sensor: 30lux, Stand-by dim level: 30%, Stand-by time: 60min.
This mode offers three levels of light: On/Off/Dim and two periods of selectable waiting time: Hold Time and Stand-by Time.



With sufficient natural light, even when motion is detected, the fixture remains **Off**.



With insufficient natural light, when motion is detected, the fixture turns **On**.




After hold time, the fixture **Dims** to stand-by level if natural light stays below daylight threshold.




The fixture switches **Off** automatically after the stand-by time.

Smart Daylight Control


Enable the smart daylight sensor functionality via dip switches or by pushing  when the remote programmer is in settings mode.



The fixture turns **On** at 100% when motion is detected.





The fixture **Dims** to stand-by level after hold time.




The fixture remains **Dimmed** to stand-by level at night.

Settings for this example:


- Hold Time: 30min
- Daylight Threshold On: 50lux
- Daylight Threshold Off: 300lux
- Stand-by Dim Level: 10%
- Stand-by Time: +∞
(when the smart photocell sensor open, stand-by period is only ∞)





When natural light exceeds the daylight threshold off, the fixture will turn **Off** even if motion is detected.



The fixture automatically turns **On** at 10% stand-by dim level when natural light is insufficient (no motion).

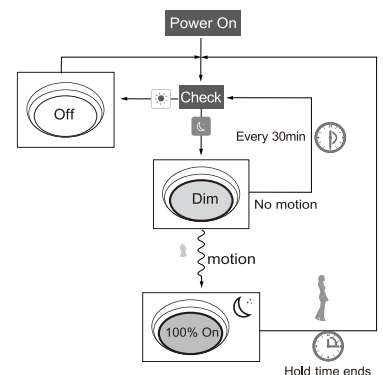


SENSOR CONFIGURATION VIA DIP SWITCHES

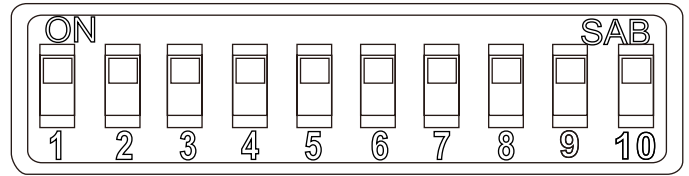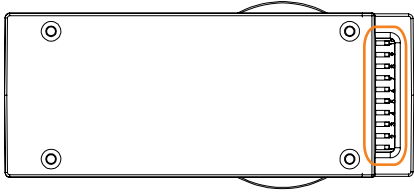


[1-2] Sensor Sensitivity

Modifies the radius of the circular detection area at ground level when the sensor is installed at a height of 40ft.

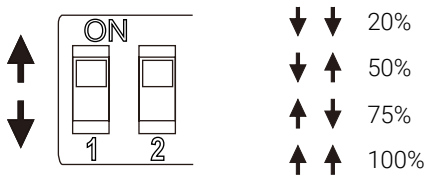


[3-4] Hold Time

Sets how long the fixture will stay On at full brightness after no motion is detected. The shortest time is only recommended for adjusting the sensor sensitivity and performing the walk test.

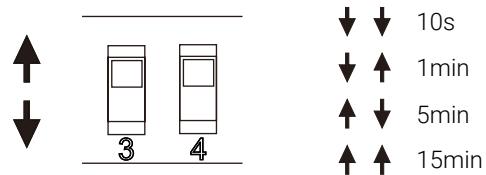


[5-6] Daylight Threshold On

If motion is detected and the ambient illumination is below the set Daylight Threshold, the fixture will turn On and hold time will start. If motion is detected and ambient illumination is above the threshold, the fixture will stay Off.

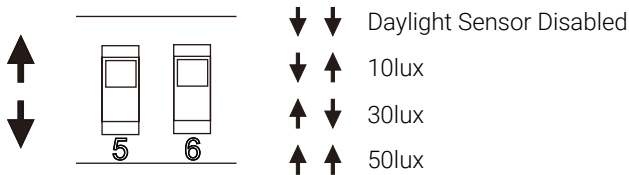


[7-8] Stand-by Dim Level

Sets the level of low light output (a % of the maximum light output of the fixture) after the Hold Time has elapsed and no further movement is detected.

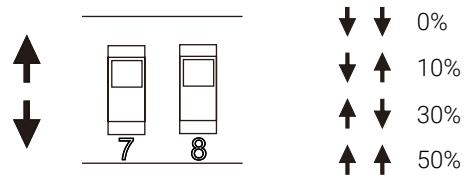


[9-10] Stand-by Time

Sets the time period to keep the fixture at a low light output (Stand-by Dim Level) before switching off in the long absence of motion.

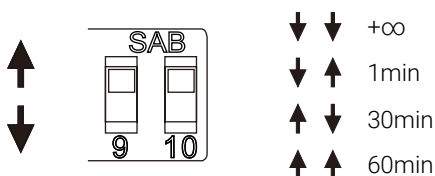

INFRARED REMOTE PROGRAMMER

The Infrared Remote Programmer (SEN-PROG), sold separately, can change all settings and modes of operation.

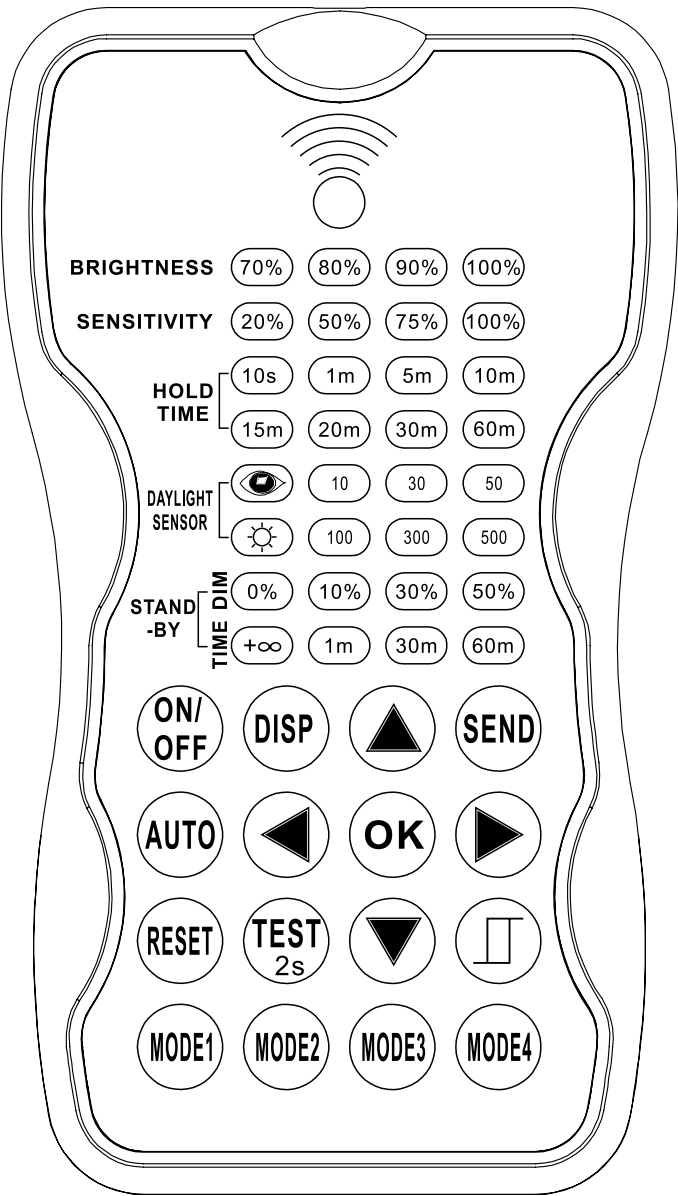

Specifications

Power Supply	2 x AAA 1.5V batteries.
Upload Range	Up to 50 ft.
Op. Temperature	0°C to 50°C (32°F to 122°F).

LED Indicators



Brightness	Light output during occupancy.
Sensitivity	Detection area of the sensor.
Hold Time	Time the sensor waits to turn off or dim the light after the area is vacated.
Daylight Sensor	Daylight sensor status and daylight threshold values in lux.
	Daylight harvesting function. Selects the current surrounding lux value as the daylight threshold.
	Daylight sensor disabled. All motion detected turns on the light, no matter how bright the natural light is.
Stand-by Dim	Light output during vacancy.
Stand-by Time	Time the sensor keeps the light at stand-by dim level after the hold time has elapsed.

Scene Modes

The remote comes with four pre-programmed modes. These can be used as is, or adjusted with different parameters and saved over an existing mode.

Scene	Application	Brightness	Sensitivity	Hold Time	Stand-by Dim	Stand-by Time	Daylight Sensor
MODE 1	Indoor	100%	75%	5min	30%	30min	Disabled
MODE 2	Indoor	100%	75%	1min	30%	+∞	Disabled
MODE 3	Indoor	100%	75%	5min	30%	30min	30lux
MODE 4	Outdoor	100%	75%	1min	30%	+∞	30lux/300lux


SENSOR COVERAGE

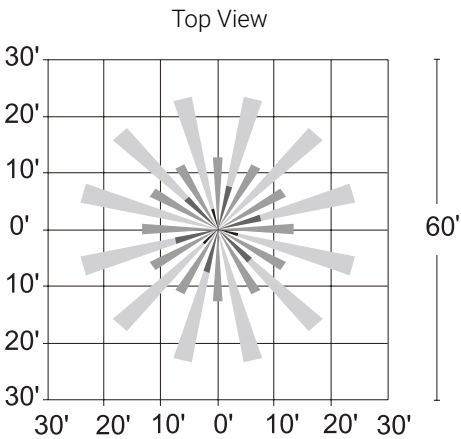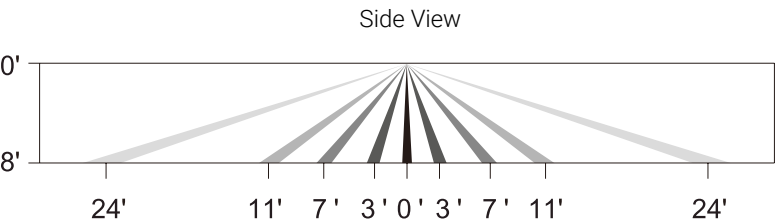


Photocell Placement Warning
Avoid installing multiple basic or non-networked photocells on the same pole or near artificial light sources, as this may cause interference or inconsistent operation.

DIMENSIONS & DRAWINGS

Sensor

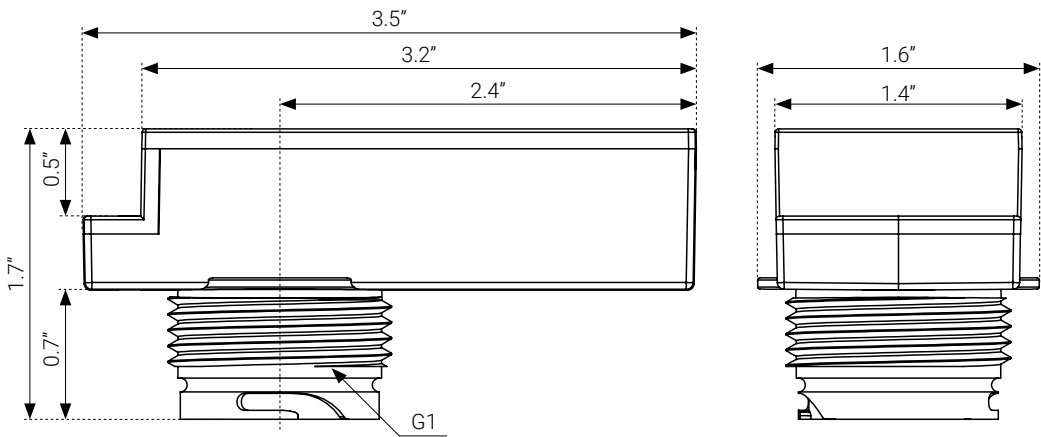

Lens



FOOTNOTES

1. The performance of sensors and lenses is influenced by various factors beyond Linmore's control, including but not limited to environmental conditions, user settings, and proper maintenance. While we provide detailed specifications and guidelines to help optimize performance, we cannot guarantee or be held liable for the performance of sensors or lenses under any particular circumstance(s). Customers are advised to test the products in their specific application environments to ensure suitability for their intended use and are responsible for all sensor and lens selections.

Updated: 2026/10/07

Linmore

2360 S Orange Ave, Fresno, CA 93725 | 559 485 6010 | info@linmoreled.com | linmoreled.com

