

# PIR-WH-EZ10

## EZ-Connect™ PIR Occupancy and Daylight Sensor



**The PIR-WH-EZ10 is a Plug & Play Passive Infrared and Daylight Sensor suitable for up to 40' Mounting Heights.**

It provides automatic On/Off/Dim control based on motion and/or daylight levels. This sensor detects motion by receiving infrared radiation (heat) from people, animals, or objects within its field of view. Rated for wet and cold locations, it can be field installed in fixtures equipped with an EZ-Connect™ receptacle with Twist Lock System. Sensitivity, timers, and light levels can be adjusted with a remote programmer (SEN-PROG), sold separately.

### TECHNICAL SPECIFICATIONS<sup>1</sup>

- **Construction:** White Polycarbonate.
- **Sensing Technology:** Passive Infrared (PIR).
- **Connection Method:** EZ10 (Compatible with EZ-Connect™ Receptacles with Twist Lock System).
- **Input Voltage:** 12-24V DC.
- **Current Consumption:** >50mA.
- **Standby Power:** ≤ 0.5W.
- **Control Output:** 0-10V, 25mA.
- **Operating Temperature Range:** -20°C to +60°C (-4°F to +140°F).
- **Max Mounting Height:** 40ft (12m).
- **Max Sensor Range:** 50ft (15m) radius.

### LISTINGS

- FCC, UL, DLC, RoHS, IP65.

### FEATURES

- EZ-Connect™: installs in seconds without tools or wiring.
- PIR Detection with 360° Coverage Pattern, best suited for indoor or outdoor areas with a clear line of sight.
- Integrated Daylight Sensor for Daylight Harvesting.
- LED Motion Indicator.
- Suitable for Indoor and Outdoor use.

### CONTROL SETTINGS


- **Sensitivity (Detection Area):** 25%/50%/75%/100%.
- **Hold Time:** 10s/1min/5min/10min/15min/20min/30min/60min.
- **Daylight Threshold On:** 10lux/30lux/50lux/current value.
- **Daylight Threshold Off:** 100lux/300lux/500lux/disabled.
- **Stand-by Time:** 1min/30min/60min/+∞.
- **Stand-by Dim Level:** 0%/10%/30%/50%.



## ORDERING

| Part Number            | Description                                                                                                                                                                                                                 |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>PIR-WH-EZ10</b>     | PIR Occupancy and Daylight Sensor, White Color, EZ-Connect™ Twist Lock System, Plug & Play, On/Off/Dim, 40' Max Mounting Height, IP65. Field installed. Sensor can be re-programmed with remote SEN-PROG (sold separately). |
| <b>SEN-PROG</b>        | Infrared Remote Programmer. Required to change default settings and modes of operation.                                                                                                                                     |
| <b>EZ10-PIR-SHIELD</b> | Sensor Shield for EZ10 PIR Sensors, 180° Detection Range, Silicone, White Color.                                                                                                                                            |

## CONNECTION DIAGRAM

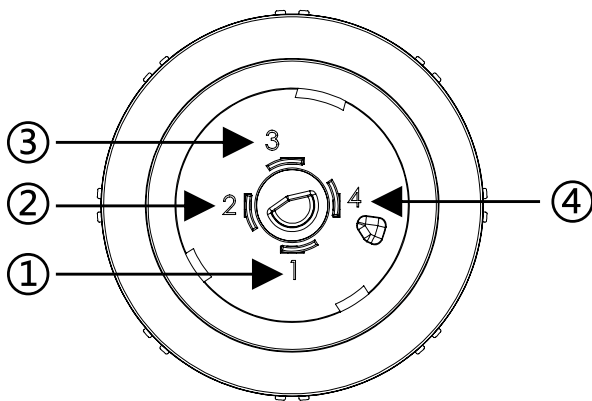

**Port 1** 12-24V DC

**Port 2** GND/DIM-



**Port 3** DIM+

**Port 4** NC



Sensor Shield

## SENSOR COVERAGE

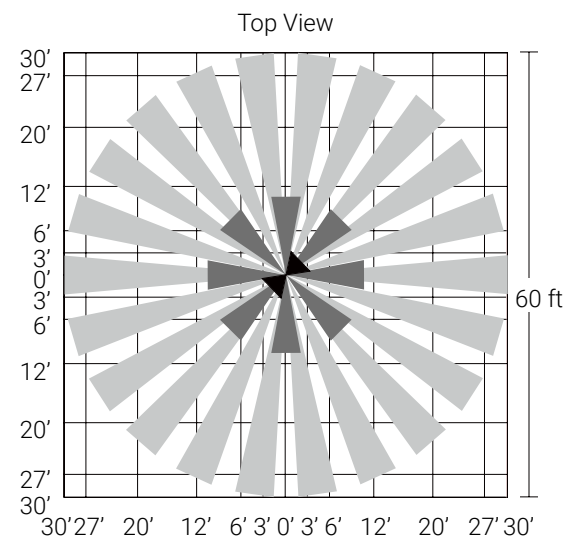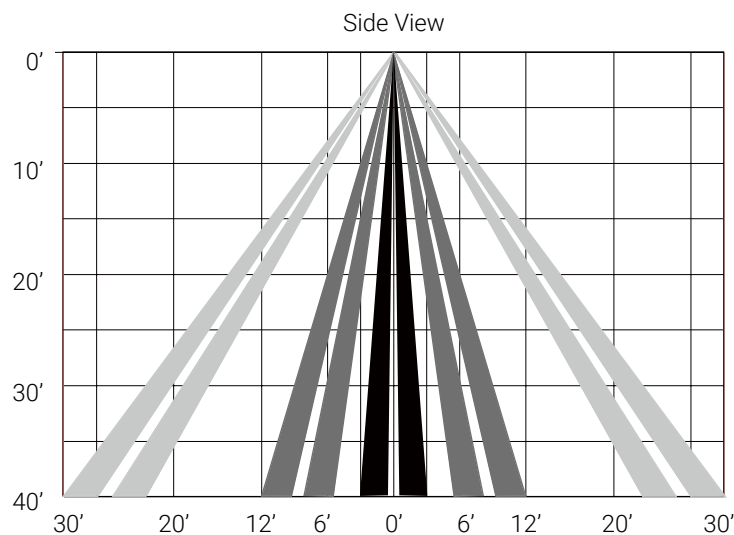

### Photocell Placement Warning

Avoid installing multiple basic or non-networked photocells on the same pole or near artificial light sources, as this may cause interference or inconsistent operation.

## SENSOR OPERATION

### On/Off/Dim (Default Mode)

**Factory default settings:** Sensitivity: 100%, Hold time: 5min, Daylight sensor: disabled, Stand-by dim level: 30%, Stand-by time: 60min. This mode offers three levels of light: On/Off/Dim and two periods of selectable waiting time: Hold Time and Stand-by Time.



With sufficient natural light, even when motion is detected, the fixture remains **Off**.



With insufficient natural light, when motion is detected, the fixture turns **On**.




After hold time, the fixture **Dims** to stand-by level if natural light stays below daylight threshold.




The fixture switches **Off** automatically after the stand-by time.

### Smart Daylight Control


Enable the smart daylight sensor functionality by pushing  when the remote programmer is in settings mode.



The fixture turns **On** at 100% when motion is detected.





The fixture **Dims** to stand-by level after hold time.




The fixture remains **Dimmed** to stand-by level at night.

Settings for this example:


- Hold Time: 30min
- Daylight Threshold On: 50lux
- Daylight Threshold Off: 300lux
- Stand-by Dim Level: 10%
- Stand-by Time: ∞  
(when the smart photocell sensor open, stand-by period is only ∞)



When natural light exceeds the daylight threshold off, the fixture will turn **Off** even if motion is detected.




The fixture automatically turns **On** at 10% stand-by dim level when natural light is insufficient (no motion).

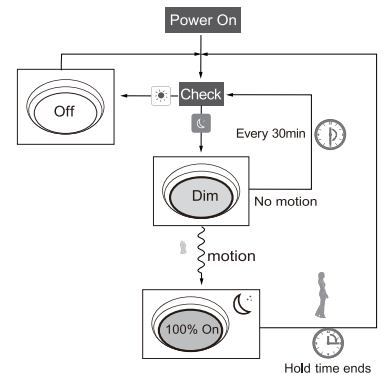

# INFRARED REMOTE PROGRAMMER

The Infrared Remote Programmer (SEN-PROG), sold separately, can change all settings and modes of operation.

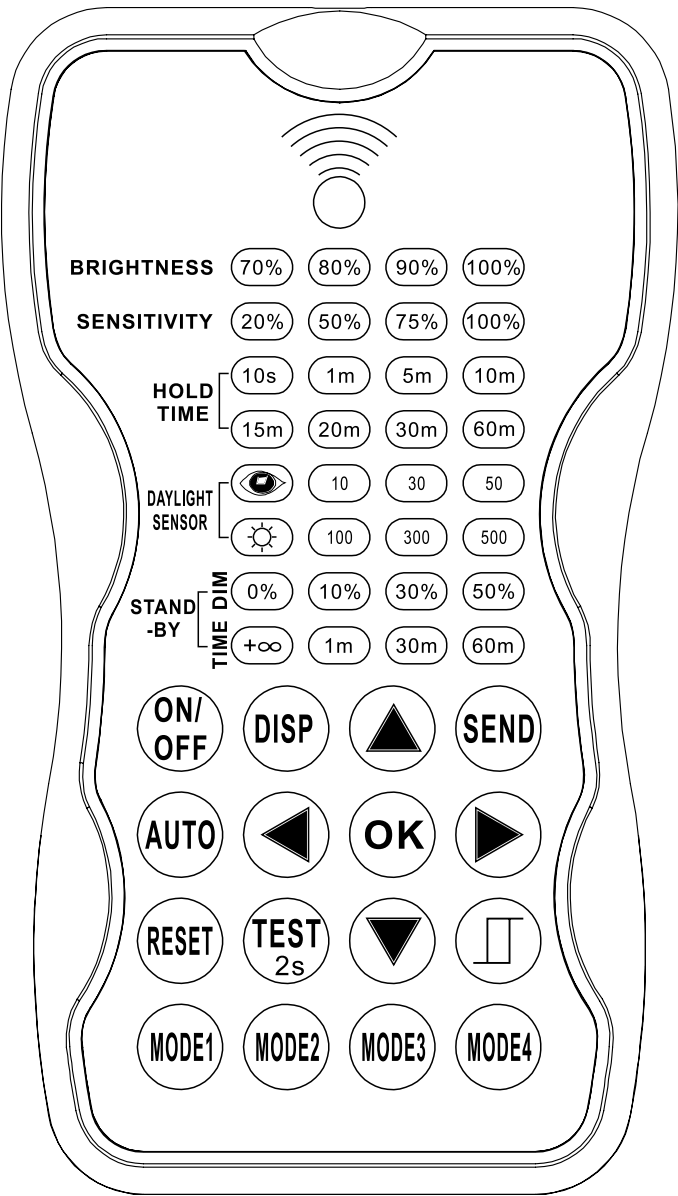

## Specifications

|                 |                              |
|-----------------|------------------------------|
| Power Supply    | 2 x AAA 1.5V batteries.      |
| Upload Range    | Up to 50 ft.                 |
| Op. Temperature | 0°C to 50°C (32°F to 122°F). |

## LED Indicators


|                 |                                                                                                                        |
|-----------------|------------------------------------------------------------------------------------------------------------------------|
| Brightness      | Light output during occupancy.                                                                                         |
| Sensitivity     | Detection area of the sensor.                                                                                          |
| Hold Time       | Time the sensor waits to turn off or dim the light after the area is vacated.                                          |
| Daylight Sensor | Daylight sensor status and daylight threshold values in lux.                                                           |
|                 | <b>Daylight harvesting function.</b><br>Selects the current surrounding lux value as the daylight threshold.           |
|                 | <b>Daylight sensor disabled.</b><br>All motion detected turns on the light, no matter how bright the natural light is. |
| Stand-by Dim    | Light output during vacancy.                                                                                           |
| Stand-by Time   | Time the sensor keeps the light at stand-by dim level after the hold time has elapsed.                                 |

## Scene Modes

The remote comes with four pre-programmed modes. These can be used as is, or adjusted with different parameters and saved over an existing mode.

| Scene  | Application | Brightness | Sensitivity | Hold Time | Stand-by Dim | Stand-by Time | Daylight Sensor |
|--------|-------------|------------|-------------|-----------|--------------|---------------|-----------------|
| MODE 1 | Indoor      | 100%       | 75%         | 5min      | 30%          | 30min         | Disabled        |
| MODE 2 | Indoor      | 100%       | 75%         | 1min      | 30%          | +∞            | Disabled        |
| MODE 3 | Indoor      | 100%       | 75%         | 5min      | 30%          | 30min         | 30lux           |
| MODE 4 | Outdoor     | 100%       | 75%         | 1min      | 30%          | +∞            | 30lux/300lux    |

## DIMENSIONS & DRAWINGS

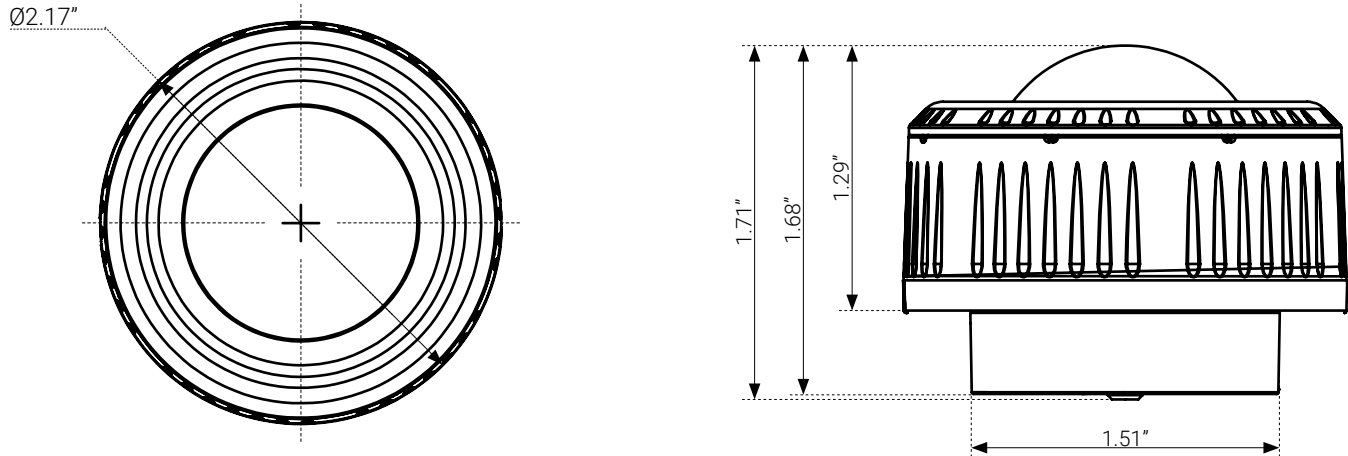

## FOOTNOTES

1. The performance of sensors and lenses is influenced by various factors beyond Linmore's control, including but not limited to environmental conditions, user settings, and proper maintenance. While we provide detailed specifications and guidelines to help optimize performance, we cannot guarantee or be held liable for the performance of sensors or lenses under any particular circumstance(s). Customers are advised to test the products in their specific application environments to ensure suitability for their intended use and are responsible for all sensor and lens selections.

Updated: 2026/10/06

### Linmore

2360 S Orange Ave, Fresno, CA 93725 | 559 485 6010 | [info@linmoreled.com](mailto:info@linmoreled.com) | [linmoreled.com](http://linmoreled.com)

