



# ULTRAGATEWAY

## UltraLink Gateway



Technology Partner  
**SILVAIR**



**The UltraLink Bluetooth Wireless Gateway is required when the user wants advanced features and time-based events.** One gateway will control up to 200 fixtures with UltraLink, allowing for energy monitoring, people tracking, and scheduling. It allows control via an Astronomical Time Clock and GPS coordinates to know exactly when the sun rises and sets. It connects to a Bluetooth mesh network and it can be accessed with the UltraLink web portal or iOS app for initial design, setup, and configuration.

## TECHNICAL SPECIFICATIONS

- Computing: 800 MHz, 32bit ARM Cortex with 512 MB RAM.
- Storage: 8GB eMMC.
- Sensor Interfaces: Bluetooth® 5.1 with extended range, Ethernet, WiFi, Wirepas.
- WAN Connectivity: 10/100 Ethernet with PoE 802.3af, Wi-Fi 802.11a/b/g/n/ac.
- Security: Supports Bluetooth® Low Energy secure connections, encrypted file system & secure boot.
- Operating Temperature Range: 0°C to +60°C (32°F to +140°F).

## LISTINGS

- FCC, IC, CE, RCM.

## FEATURES


- Simple, Flexible, Extended Connectivity: Bluetooth® 5.1, 802.15.4, mesh, Wi-Fi, Ethernet. Outbound and inbound amplification significantly increases connectivity range.
- Easy Management: Web portal and iOS app access for configuration, monitoring, and alerts.
- Multi-Level Security: Hardware security module, encrypted file system, secure BootSensor.
- Edge-Computing: Reduced latency and better management of the data being generated by IoT devices & sensors.
- Suitable for indoor use only.
- 5-year product warranty.
- Technology partner Silvair.




## ORDERING

Part Number	Description
<b>ULTRAGATEWAY</b>	UltraLink Bluetooth Wireless Gateway, long-range Bluetooth mesh, 800 MHz ARM with 512 MB RAM, 8 GB storage, hardware security module, encrypted file system, secure boot, interior installation only.

## DIMENSIONS & DRAWINGS

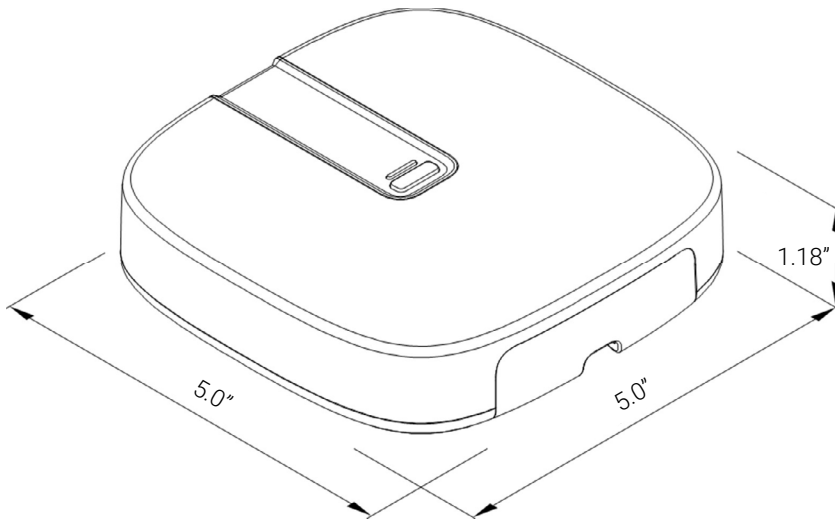

## INTERFACES

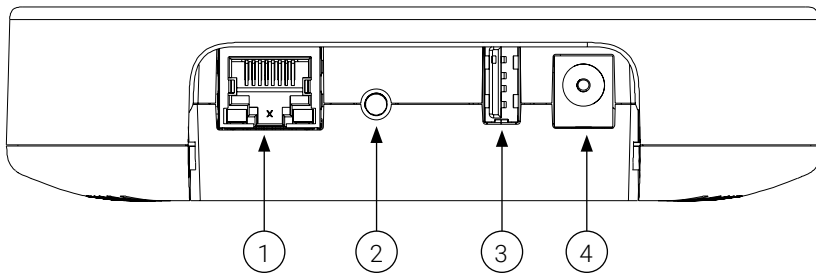

1. Single 10/100 Base-T Ethernet connector with PoE support.
2. Reset Button.
3. USB 2.0 Type-A connector.
4. Power Input (5V DC / 2A).

### Reset Button:

Quick press (< 2 seconds) = Soft reboot.  
Short press (2-4 seconds) = Network reset.  
Long press (10 -15 seconds) = Hard reset.  
Very long press (> 30 seconds) = Factory reset.

Updated: 2023.07.17

### Linmore LED Labs, Inc.

2360 S Orange Ave, Fresno, CA 93725 | 559 485 6010 | info@linmoreled.com | linmoreled.com

