

PROJECT NAME		DATE	
CAT. NUMBER			
NOTES			

SPEC SHEET

Ace LED Wrap (AS2-R)

LED WRAP FIXTURE



Sensor sold separately



Projected L70 up to 150,000 hours

KEY FEATURES

- 4ft Nominal Length
- 3,625 to 4,875 Lumens
- Up to 125 LPW
- Selectable CCT:
(3500K, 4000K, 5000K)
- Selectable Output Power:
(29W, 33W, 39W)
- Frosted Lens
- Low Glare




Selectable Wattage

Each fixture has a switch with three output power options, allowing to select the desired lumen output and energy consumption for each application.



Selectable Color Temperature

Simply use the switch directly on the fixture to select the desired color temperature for your space: 3500K, 4000K, or 5000K.



EZ-Connect™ Receptacle

The simplest and fastest way to add sensors and UltraLink wireless controls at any time in the field. Snap-in system, no tools or wiring needed.

FEATURES & SPECIFICATIONS

CONSTRUCTION

- **Housing:** Galvanized Steel. Low profile design.
- **Housing Color:** White.
- **EZ-Connect™ Receptacle:** The simplest and fastest way to add sensors and wireless controls at any time on the field. Snap-in system, no tools or wiring needed.

ELECTRICAL

- **Power Input:** 120-277V (50/60Hz).
- **Power Factor:** Greater than 0.9.
- **Total Harmonic Distortion:** Less than 20%.
- **Emergency Battery Backup:** 9 Watts output. Fixtures with EMB will produce ~1,100lm for a minimum of 90 minutes. Field installed. Available as an accessory, sold separately.

OPERATION

- **Environment:** For interior applications, dust-resistant, listed for damp locations.
- **Ambient Range Operation:** -20°C up to 35°C (-4°F up to 95°F).

OPTICS

- **CCT:** 3500K, 4000K, 5000K (selectable via switches).
- **CRI:** 80+ standard.
- **Lens:** Frosted prismatic PC diffuser. 110° beam angle.

MOUNTING

- **Surface Mount:** Surface mount standard.
- **Suspension Mount:** Suspended mount kit available as an accessory.

CONTROLS¹

- **Dimming:** 0-10V standard. Dim to Off. Dimming range 100% to 5%.
- **Occupancy Sensors:** PIR sensor, On/Off/Dim. EZ-Connect™ Snap-in system for field installation.
- **Networked Lighting Controls:** UltraLink Wireless Controls with Bluetooth® NLC Mesh technology. EZ-Connect™ Snap-in system for field installation.



WARRANTY

- **5 Year Warranty:** The fixture is guaranteed for 5 years free of defects in materials and workmanship, including LEDs and driver. "Defective" is considered if ten percent (10%) or more of the LEDs, per product, are non-operating LEDs, or color temperature has shifted more than 500° Kelvin within the warranty period. See terms and conditions at <https://linmoreled.com/warranty>

LISTINGS & CERTIFICATIONS

- UL listed.
- RoHS compliant.
- UL listed for damp locations.
- DesignLights™ Consortium Premium.

TECHNICAL SPECS


SIZE	WATTS	LUMEN OUTPUT	EFFICACY	PART NUMBER
4ft	29 / 33 / 39	3,625 / 4,125 / 4,875	125	AS20R-A2-ADJ-04-ADJ-80-FR-LV-FXT-EZ40-10V

Typical lumen output (±10%) at 5000K CCT and 277V (LV) under 25°C ambient temperature.

Selectable Wattage and Color Temperature

Fixtures ship from the factory with the highest wattage and 4000K CCT, to change these settings:

1. Make sure the fixture is off.
2. Remove the diffuser by sliding the small lids (C) out of the end cap of the fixture base (A), then take out the diffuser (B).
3. Adjust the dip switches located on the driver inside the fixture to select output power and color temperature.

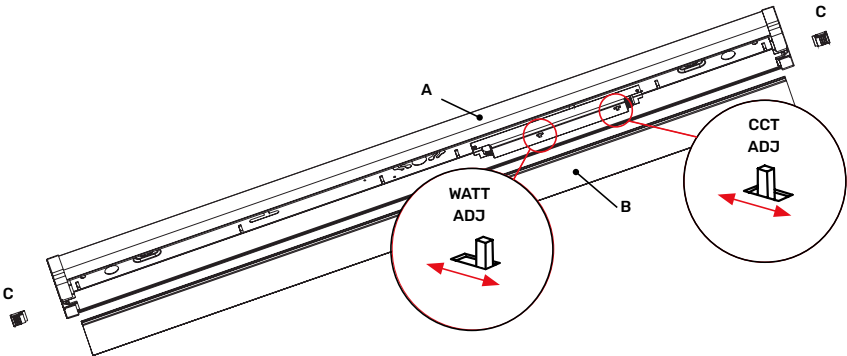

ORDERING

SERIES MODEL - COMPLIANCE - WATTS - SIZE	COLOR TEMP	CRI	LENS	VOLTAGE
AS20R-A2-ADJ-04	ADJ Adjustable/Selectable: 3500K, 4000K, 5000K	80 80+ CRI	FR Frosted lens	LV 120-277V

MOUNTING	CONTROLS ¹	DIMMING
FXT Full fixture Mounting kits sold separately, see Accessories	EZ40 EZ-Connect™ Receptacle with Snap-in system (standard) Sensors not included, see Controls pages for available products	10V 0-10V

Ordering Example: AS20R-A2-ADJ-04-ADJ-80-FR-LV-FXT-EZ40-10V

ACCESSORIES



Must be ordered separately. Packaged separately.

FIXTURE ACCESSORIES		
Part Number	Type	Description
SAFETYCABLE	Safety Kit	Kit includes (1) 10 ft. aircraft cable with single snap hook, L-bracket, screw and nut.
CABLEKIT	Cable Kit	Kit includes (2) 10 ft. aircraft "Y" cables and (2) snap hooks.
HANGERKIT	Hanger Kit	Kit includes 2 Cable and Toggle Hangers.
AS2-SPMK	Suspended Mount Kit	Suspended Mount Kit
AS2-EMB-09W	Emergency Battery Backup	Emergency Backup Driver with Battery, 9 Watts output for >90 minutes. Simple Wiring, Metal Conduit. Field installed.

BASIC CONTROLS


Controls are field installed, must be ordered as a new line item and will ship in a separate box.

BASIC SENSORS¹

	Part Number	Description
	PIR-WH-EZ40	PIR Occupancy and Daylight Sensor, EZ-Connect Snap-in System, Plug & Play, On/Off/Dim, 12' Max Mounting Height, IP20. Field installed. Sensor can be re-programmed with remote SEN-PROG (sold separately).
	SEN-PROG	Infrared Remote Programmer for Occupancy Sensors. Required to change default settings and modes of operation.



DEFAULT SETTINGS

Sensitivity=100%, Hold time=5min, Daylight sensor=disabled, Stand-by dim level=30%, Stand-by time=60min.

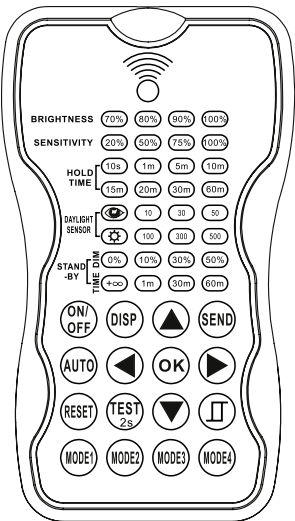

INFRARED REMOTE PROGRAMMER

Required to change default settings and modes of operation.

Brightness	Light output during occupancy (70%, 80%, 90%, 100%).		Daylight harvesting function. Selects the current surrounding lux value as the daylight threshold.
Sensitivity	Detection area of the sensor (20%, 50%, 75%, 100%).		Daylight sensor disabled. All motion detected turns on the light, no matter how bright the natural light is.
Hold Time	Time the sensor waits to turn off or dim the light after the area is vacated.	Stand-by Dim	Light output during vacancy (0%, 10%, 30%, 50%).
Daylight Sensor	Daylight sensor status and daylight threshold values in lux.	Stand-by Time	Time the sensor keeps the light at stand-by dim level after the hold time has elapsed.

Scene Modes

The remote comes with four preprogrammed modes. These can be used as is, or adjusted with different parameters and saved over an existing mode.



Scene	Application	Brightness	Sensitivity	Hold Time	Stand-by Dim	Stand-by Time	Daylight Sensor
MODE 1	Indoor	100%	75%	5min	30%	30min	Disabled
MODE 2	Indoor	100%	75%	1min	30%	+∞	Disabled
MODE 3	Indoor	100%	75%	5min	30%	30min	30lux
MODE 4	Outdoor	100%	75%	1min	30%	+∞	30lux/300lux

ULTRALINK BLUETOOTH CONTROLS







Controls are field installed, must be ordered as a new line item and will ship in a separate box.


ULTRALINK CONTROLLERS / SENSORS¹

Part Number	Description
 ULTRAPIR-WH-EZ40	UltraLink Bluetooth NLC Wireless Fixture Controller with PIR Occupancy and Daylight Sensor, White Color, EZ-Connect Snap-in System, 12' Max Mounting Height, IP20, Silvoir Firmware. Field installed.
 SEN-PROG	Infrared Remote Programmer for Occupancy Sensors. Only required for EZ40 UltraLink sensors to change detection sensitivity.

ULTRALINK ACCESSORIES

Part Number	Description
 ULTRAGATEWAY	UltraLink Bluetooth NLC Wireless Gateway, required for Advanced Features and Time-Based Events. One gateway can control up to 200 fixtures, allowing for energy monitoring, people tracking, and scheduling. Interior installation only.
 ULTRAGATEWAY-EXT	UltraLink Bluetooth NLC Wireless Exterior Rated Gateway Box with Long Range Antenna, includes ULTRAGATEWAY. 120-277V Power Supply required.
 ULTRATIME-BAT	UltraLink Bluetooth NLC Time-Keeping Battery Backup includes an Outdoor Rated Enclosure, a Long Range Antenna and a Backup Battery. For use to keep time during a power outage and for in-node scheduling.
 ULTRADASH	UltraLink Dashboards for Energy, Occupancy Heat Mapping, and Energy Heat Mapping. Gateway (ULTRAGATEWAY) required, sold separately.


DIMENSIONS & DRAWINGS

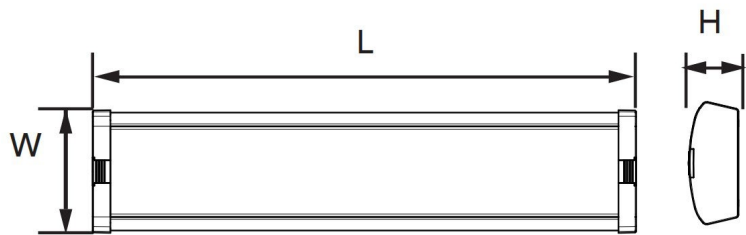

Size	L	W	H
4ft	47.60"	5.31"	2.17"

Dimension tolerances: $\pm 0.1"$. If weight is a concern, please contact factory.

PHOTOMETRY

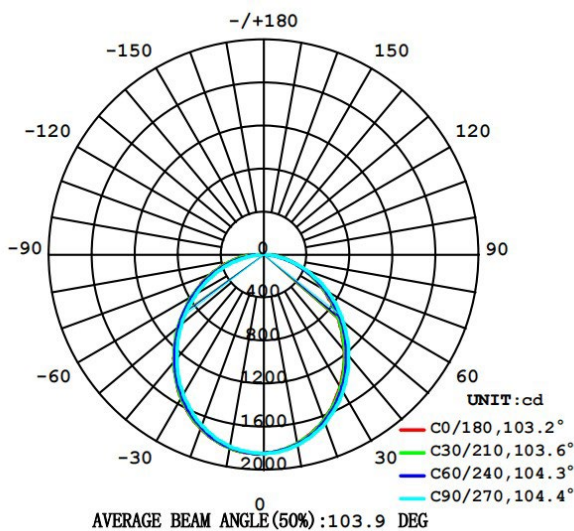

FOOTNOTES

1. The performance of sensors and lenses is influenced by various factors beyond Linmore LED's control, including but not limited to environmental conditions, user settings, and proper maintenance. While we provide detailed specifications and guidelines to help optimize performance, we cannot guarantee or be held liable for the performance of sensors or lenses under any particular circumstance(s). Customers are advised to test the products in their specific application environments to ensure suitability for their intended use and are responsible for all sensor and lens selections.

Linmore LED Labs, Inc.
2360 S Orange Ave, Fresno, CA 93725
559 485 6010 | info@linmoreled.com | linmoreled.com



All specifications are subject to change without notice. Please visit linmoreled.com for latest information. All values are typical or design values and series averages. Actual performance may differ as a result of end-user environments and applications. Consult Linmore LED with specific inquiries. Copyright © 2025, Linmore LED Labs, Inc. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Linmore LED.