



SITE LIGHTER (SL2) BACK LIGHT SHIELD (BLS) INSTALLATION INSTRUCTIONS

These instructions do not purport to cover all details or variations in components nor to provide for every possible contingency to be met in connection with installation, operation, or maintenance.

Should further information be desired or should a particular problem arise which is not covered sufficiently for the purchaser's purpose, the matter should be referred to Linmore LED Labs.

Linmore does not claim liability for any installation not performed according to this guide or not by a qualified electrician.

READ AND FOLLOW ALL SAFETY INSTRUCTIONS SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

When using electrical equipment, basic safety precautions should always be followed including the following:


1. **DANGER – RISK OF SHOCK – DISCONNECT POWER BEFORE INSTALLATION**
2. **WARNING** – Risk of fire or electric shock. Installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Product must be installed in accordance with NEC or your local electrical code. If you are not familiar with these codes and requirements, contact a qualified electrician.
3. **WARNING** – Risk of fire or electric shock. Wiring and electrical parts may be damaged when drilling for installation of the LED luminaire. Check for enclosed wiring and components.
4. **WARNING** – Risk of fire or electric shock. Check the existing wiring for damage before installing. Do not install if existing wires are damaged.
5. **WARNING** – To prevent wiring damage or abrasion, do not expose wires to the edge of sheet metal or any other sharp objects.
6. Only the holes indicated in the photographs or drawings may be made or altered as a result of the kit installation. Do not leave any other holes open in a wiring enclosure or electrical component.
7. Thoroughly inspect luminaire for any freight damage upon receipt. All damage should be reported to the delivery carrier.

MECHANICAL INSTALLATION

Back Light Shield (SL2-xxx-BLS)

Tools required:

1. #1 Philips screwdriver.

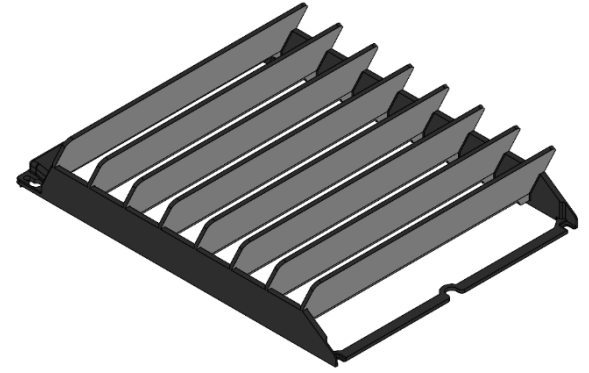


Installation steps:

Step 1: Loosen the four (4) corner M3 screws on the optic by approx. four (4) turns.

Step 2: Align the BLS key holes to the screws and push the shield onto the optic and forward to engage all four (4) screws.

Step 3: Tighten all four (4) screws to secure the BLS on the optic.

Step 4: Repeat installation Steps 1-3 for remaining optics if necessary.

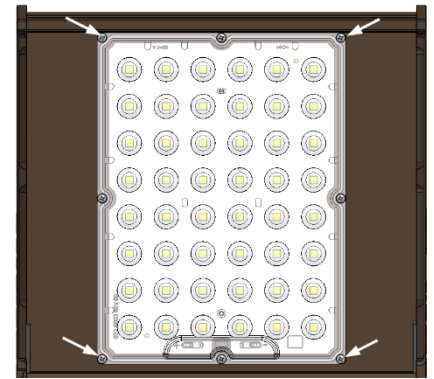

Notes:

- Screws used are M3x10mm Stainless steel.
- Shield louvers may be trimmed with a utility knife at the notch for less aggressive cutoff.

