

PROJECT NAME		DATE	
CAT. NUMBER			
NOTES			

SPEC SHEET

Ace LED Area Light (AA1)

AREA LIGHT LED FIXTURE



IP65



IK08



10kV




0-10V

Projected L70 up to 150,000 hours


KEY FEATURES

- 10,500 to 45,000 Lumens
- Up to 150 LPW
- Up to 50°C (122°F) Ambient
- Die-cast Aluminum Housing and Heatsink
- Compact Low-Profile Design
- Versatile Mounting Options
- Tool-less Access via Latches
- Wet Location Rated



Selectable CCT and Wattage

Integrated switches in the fixture allow to select three color temperatures: 3000K, 4000K, or 5000K and four wattage options.



Easy Swap Lenses

Open two latches to change the optic lens in seconds without tools while keeping the IP65 rating. Available optics: T2, T3, T4, and T5.



EZ-Connect™ Receptacle

The simplest and fastest way to add sensors and UltraLink wireless controls at any time in the field. Twist Lock system, no tools or wiring needed.

FEATURES & SPECIFICATIONS

CONSTRUCTION

- **Housing:** Aluminum die-cast, compact low profile design.
- **Housing Color:** Standard offering in Bronze (RAL 8019). Black or White available with extended lead time.
- **Wireway Cover:** Aluminum die-cast.
- **Heat Sink:** Cast aluminum.
- **Latches:** Tool-less access to driver and lens compartments.
- **EZ-Connect™ Receptacle:** The simplest and fastest way to add sensors and wireless controls at any time on the field. Twist Lock system, no tools or wiring needed.

ELECTRICAL

- **Power Input:** 120-277V or 277-480V (50/60Hz) typical.
- **Power Factor:** Greater than 0.9.
- **Total Harmonic Distortion:** Less than 20%.
- **Surge Protection:** 10kV standard.

OPERATION

- **Environment:** Wet location for exterior applications. IP65 rated.
- **Ambient Range Operation:** -40°C up to 50°C (-22°F up to 122°F).

OPTICS

- **CCT:** Selectable via switch 3000K, 4000K, 5000K.
- **CRI:** 80+ standard.
- **Lens:** UV stable clear polycarbonate. T2, T3, T4, and T5 available. Replaceable in the field by opening two clasps, no tools needed.

MOUNTING

- **Mounting:** The fixture comes standard with a bracket base attached. Slip Fitter, Straight Arm, and Trunnion (Yoke) brackets are field installed (see Accessories).



CONTROLS¹

- **Dimming:** 0-10V standard. Dimming range 100% to Off.
- **Photocell Sensor:** On/Off based on ambient light. EZ-Connect™ Twist Lock system for field installation.
- **Occupancy Sensors:** PIR and Microwave occupancy sensors, On/Off/Dim. EZ-Connect™ Twist Lock system for field installation.
- **Networked Lighting Controls:** UltraLink Wireless Controls with Bluetooth® NLC Mesh technology. EZ-Connect™ Twist Lock system for field installation.

WARRANTY

- **5 Year Warranty:** The fixture is guaranteed for 5 years free of defects in materials and workmanship, including LEDs and driver. "Defective" is considered if ten percent (10%) or more of the LEDs, per product, are non-operating LEDs, or color temperature has shifted more than 500° Kelvin within the warranty period. See terms and conditions at <https://linmoreled.com/warranty>

LISTINGS & CERTIFICATIONS

- cUL, UL 1598.
- RoHS compliant.
- IP65 and IK08 rated.
- DesignLights™ Consortium Premium.

TECHNICAL SPECS

SIZE	WATTS	SELECTABLE CCT	LUMEN OUTPUT	EFFICACY	PART NUMBER
MD	75	3000K	10,500	140	AA10S-A2-75-MD-ADJ-80-T3-LV-BRN-BB-EZ10-CW-SRG-10V
		4000K	11,250	150	
		5000K	10,875	145	
	100	3000K	14,000	140	AA10S-A2-100-MD-ADJ-80-T3-LV-BRN-BB-EZ10-CW-SRG-10V
		4000K	15,000	150	
		5000K	14,500	145	
	120	3000K	16,800	140	AA10S-A2-120-MD-ADJ-80-T3-LV-BRN-BB-EZ10-CW-SRG-10V
		4000K	18,000	150	
		5000K	17,400	145	
	150	3000K	21,000	140	AA10S-A2-150-MD-ADJ-80-T3-LV-BRN-BB-EZ10-CW-SRG-10V
		4000K	22,500	150	
		5000K	21,750	145	
LG	175	3000K	24,500	140	AA10S-A2-175-LG-ADJ-80-T3-LV-BRN-BB-EZ10-CW-SRG-10V
		4000K	26,250	150	
		5000K	25,375	145	
	200	3000K	28,000	140	AA10S-A2-200-LG-ADJ-80-T3-LV-BRN-BB-EZ10-CW-SRG-10V
		4000K	30,000	150	
		5000K	29,000	145	
	240	3000K	33,600	140	AA10S-A2-240-LG-ADJ-80-T3-LV-BRN-BB-EZ10-CW-SRG-10V
		4000K	36,000	150	
		5000K	34,800	145	
	300	3000K	42,000	140	AA10S-A2-300-LG-ADJ-80-T3-LV-BRN-BB-EZ10-CW-SRG-10V
		4000K	45,000	150	
		5000K	43,500	145	

Typical lumen output (±10%) at 277V (LV) under 25°C ambient temperature.

Selectable Color Temperature

All fixtures ship from the factory with 5000K CCT, to change this:


- 1. Make sure the fixture is off.
- 2. Unscrew the 3/4" plug.
- 3. Adjust the corresponding dip switch to desired CCT.
- 4. Install and tighten the 3/4" plug.

Fixtures with a Specified Wattage

Fixtures can be ordered with a specific wattage setting indicated in the part number. For example, model AA10S-A2-**240**-LG-ADJ is factory-set to 240W. If needed and permitted, this setting can later be adjusted with a DIP switch.

Fixtures with Selectable Wattage

Fixtures can be ordered with 'ADJ' in the wattage section of the part number (e.g., AA10S-A2-**ADJ**-LG-ADJ). These ship at the highest wattage setting and can be adjusted in the field with a DIP switch.

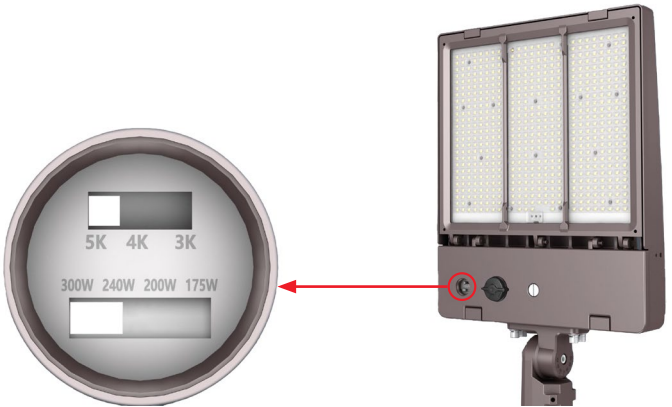

ORDERING

SERIES MODEL - COMPLIANCE - WATTS - SIZE		COLOR TEMP	CRI	LENS		VOLTAGE
AA10S-A2-ADJ-MD	AA10S-A2-ADJ-LG	ADJ Adjustable (selectable): 3000K, 4000K, 5000K	80 80+ CRI	T2 Type 2	T4 Type 4	LV 120-277V
AA10S-A2-75-MD	AA10S-A2-175-LG					
AA10S-A2-100-MD	AA10S-A2-200-LG					
AA10S-A2-120-MD	AA10S-A2-240-LG			T3 Type 3	T5 Type 5	HV 277-480V
AA10S-A2-150-MD	AA10S-A2-300-LG					

HOUSING COLOR	MOUNTING	SENSORS¹	CORD	OPTIONS	DIMMING
BRN Bronze (standard)	BB Bracket Base (standard)	EZ10 EZ-Connect™ Receptacle with Twist Lock system (standard) Sensors not included, see Controls pages for available products	CW Cord Whip, 6A, no plug (standard)	SRG Fixture installed Surge Protector, 10kV (standard)	10V 0-10V
BLK Black (extended lead time)					
WHT White (extended lead time)					

Ordering Example: AA10S-A2-100-MD-ADJ-80-T3-LV-BRN-BB-EZ10-CW-SRG-10V

ACCESSORIES

Replace xxx with color (BRN, BLK, or WHT). Must be ordered separately. Packaged separately.

FIXTURE ACCESSORIES		
Part Number	Type	Description
AA1-SF-xxx	Mounting Bracket	Slip Fitter Bracket. Field installed.
AA1-SA-xxx	Mounting Bracket	Straight Arm Bracket. For round and square poles. Field installed.
AA1-TM-xxx	Mounting Bracket	Trunnion (Yoke) Bracket. Field installed.
WM-xxx-SL2	Mounting Bracket	Wall Mount Box, for mounting fixtures to a standard 4" electrical box or directly to any exterior wall with appropriate fasteners.
AA1-GSFB-MD	Glare Shield	Front and Back Glare Shields for MD fixtures. Field installed.
AA1-GSFB-LG	Glare Shield	Front and Back Glare Shields for LG fixtures. Field installed.
AA1-GSLR-MD	Glare Shield	Left and Right Glare Shields for MD fixtures. Field installed.
AA1-GSLR-LG	Glare Shield	Left and Right Glare Shields for LG fixtures. Field installed.
AA1-T2-MD	Replacement Optics	Type 2 Optics for MD fixtures. Easy swap, no tools needed. Field installed.
AA1-T3-MD	Replacement Optics	Type 3 Optics for MD fixtures. Easy swap, no tools needed. Field installed.
AA1-T4-MD	Replacement Optics	Type 4 Optics for MD fixtures. Easy swap, no tools needed. Field installed.
AA1-T5-MD	Replacement Optics	Type 5 Optics for MD fixtures. Easy swap, no tools needed. Field installed.
AA1-T2-LG	Replacement Optics	Type 2 Optics for LG fixtures. Easy swap, no tools needed. Field installed.
AA1-T3-LG	Replacement Optics	Type 3 Optics for LG fixtures. Easy swap, no tools needed. Field installed.
AA1-T4-LG	Replacement Optics	Type 4 Optics for LG fixtures. Easy swap, no tools needed. Field installed.
AA1-T5-LG	Replacement Optics	Type 5 Optics for LG fixtures. Easy swap, no tools needed. Field installed.

BASIC CONTROLS


BASIC SENSORS¹

	Part Number	Description
	PC-WH-EZ10 or PC-BK-EZ10	Photocell, White or Black Color, EZ-Connect Twist Lock System, Plug & Play, Field installed.
	PIR-WH-EZ10 or PIR-BK-EZ10	PIR Occupancy and Daylight Sensor, White or Black Color, EZ-Connect Twist Lock System, Plug & Play, On/Off/Dim, 40' Max Mounting Height, IP65. Field installed.
	MW-WH-EZ10 or MW-BK-EZ10	Microwave Occupancy and Daylight Sensor, White or Black Color, EZ-Connect Twist Lock System, Plug & Play, On/Off/Dim, 40' Max Mounting Height, IP65. Field installed.
	SEN-PROG	Infrared Remote Programmer for Occupancy Sensors. Required to change default settings, modes of operation, and detection sensitivity for all EZ10 basic sensors.

Controls are field installed, must be ordered as a new line item and will ship in a separate box.

DEFAULT SETTINGS

For PIR and MW Sensors: Sensitivity=100%, Hold time=5min, Daylight sensor=disabled, Stand-by dim level=30%, Stand-by time=60min.

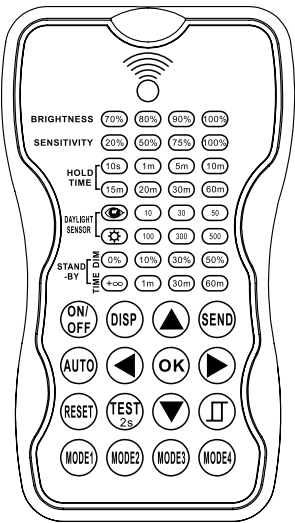

INFRARED REMOTE PROGRAMMER

Required to change default settings, modes of operation, and sensitivity.

Brightness	Light output during occupancy (70%, 80%, 90%, 100%).		Daylight harvesting function. Selects the current surrounding lux value as the daylight threshold.
Sensitivity	Detection area of the sensor (20%, 50%, 75%, 100%).		Daylight sensor disabled. All motion detected turns on the light, no matter how bright the natural light is.
Hold Time	Time the sensor waits to turn off or dim the light after the area is vacated.	Stand-by Dim	Light output during vacancy (0%, 10%, 30%, 50%).
Daylight Sensor	Daylight sensor status and daylight threshold values in lux.	Stand-by Time	Time the sensor keeps the light at stand-by dim level after the hold time has elapsed.

Scene Modes

The remote comes with four pre-programmed modes. These can be used as is, or adjusted with different parameters and saved over an existing mode.

Scene	Application	Brightness	Sensitivity	Hold Time	Stand-by Dim	Stand-by Time	Daylight Sensor
MODE 1	Indoor	100%	75%	5min	30%	30min	Disabled
MODE 2	Indoor	100%	75%	1min	30%	+∞	Disabled
MODE 3	Indoor	100%	75%	5min	30%	30min	30lux
MODE 4	Outdoor	100%	75%	1min	30%	+∞	30lux/300lux

ULTRALINK CONTROLLERS / SENSORS¹

Part Number	Description
 ULTRA-WH-EZ10 or ULTRA-BK-EZ10	UltraLink Bluetooth NLC Wireless Receiver and Fixture Controller, White or Black* Color, EZ-Connect Twist Lock System, IP65, Silvair Firmware. Field installed.
 ULTRAHGA-CL-EZ10	UltraLink Bluetooth NLC Wireless Receiver and Fixture Controller with Long Range Antenna, Clear Color, EZ-Connect Twist Lock System, IP65, Silvair Firmware. Field installed.
 ULTRAPIR-WH-EZ10 or ULTRAPIR-BK-EZ10	UltraLink Bluetooth NLC Wireless Fixture Controller with PIR Occupancy and Daylight Sensor, White or Black* Color, EZ-Connect Twist Lock System, 40' Max Mounting Height, IP65, Silvair Firmware. Field installed.
 ULTRAMW-WH-EZ10 or ULTRAMW-BK-EZ10	UltraLink Bluetooth NLC Wireless Fixture Controller with Microwave Occupancy and Daylight Sensor, White or Black* Color, EZ-Connect Twist Lock System, 40' Max Mounting Height, IP65, Silvair Firmware. Field installed.
 SEN-PROG	Infrared Remote Programmer for Occupancy Sensors. Only required for EZ10 UltraLink sensors to change detection sensitivity.

Controls are field installed, must be ordered as a new line item and will ship in a separate box.



ULTRALINK ACCESSORIES

Part Number	Description
 ULTRAGATEWAY	UltraLink Bluetooth NLC Wireless Gateway, required for Advanced Features and Time-Based Events. One gateway can control up to 200 fixtures, allowing for energy monitoring, people tracking, and scheduling. Interior installation only.
 ULTRAGATEWAY-EXT	UltraLink Bluetooth NLC Wireless Exterior Rated Gateway Box with Long Range Antenna, includes ULTRAGATEWAY. 120-277V Power Supply required.
 ULTRAGATEWAY-EXT-4G	UltraLink Bluetooth NLC Wireless Exterior Rated Gateway Box with Long Range Antenna and 4G Cellular Connectivity. Includes ULTRAGATEWAY-4G in a Vented, Temperature-Controlled NEMA Enclosure, Universal Voltage (120, 208, 240, 277, and 480V), Wall Mount, 24 Hour Battery Backup. Optional pole mount kit. Cellular data plans available.
 ULTRATIME-BAT	UltraLink Bluetooth NLC Time-Keeping Battery Backup includes an Outdoor Rated Enclosure, a Long Range Antenna and a Backup Battery. For use to keep time during a power outage and for in-node scheduling.
 ULTRADASH	UltraLink Dashboards for Energy, Occupancy Heat Mapping, and Energy Heat Mapping. Gateway (ULTRAGATEWAY) required, sold separately.

MOUNTING

Bracket Base

The fixture ships with the Bracket Base attached to it. Mounting brackets can be attached to the base with just one screw.



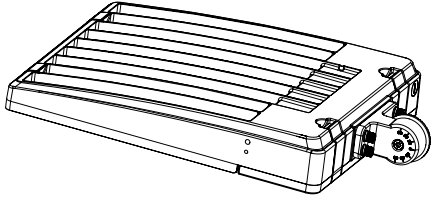


Mounting Brackets

Mounting brackets are sold separately and are field installed.




Slip Fitter

AA1-SF

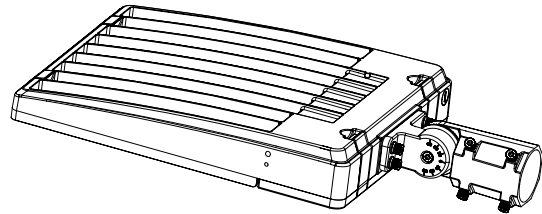




Straight Arm

AA1-SA

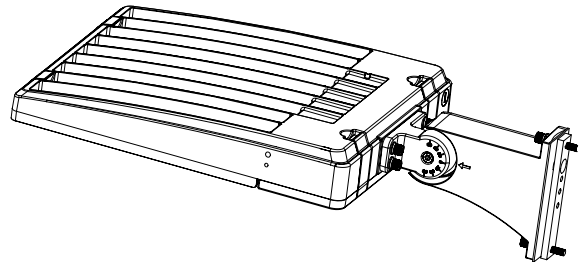

Trunion (Yoke)



AA1-TM

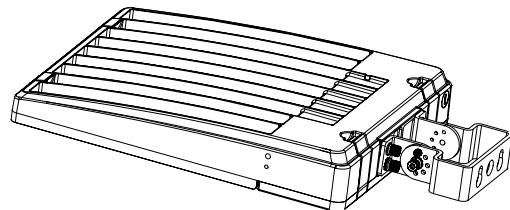

DIMENSIONS & DRAWINGS


Dimension tolerances: ± 0.1". Mounting hardware and sensors add height to the fixture.

Slip Fitter Bracket

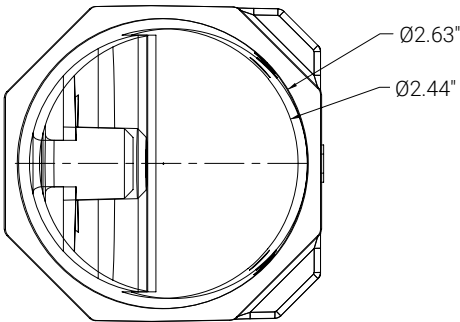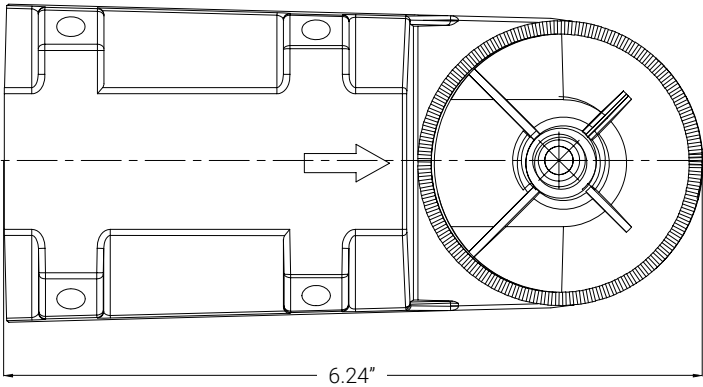


Fixture with Slip Fitter


MD

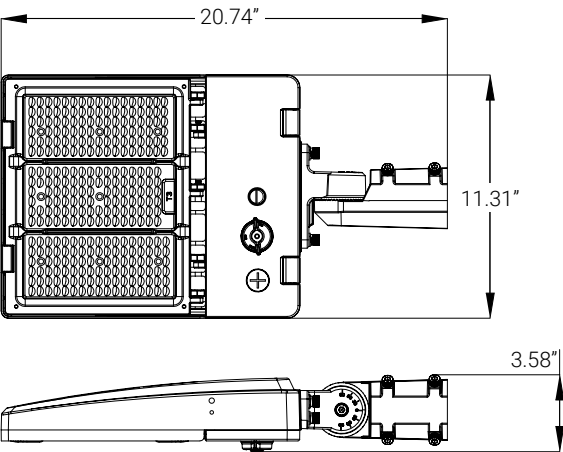

LG

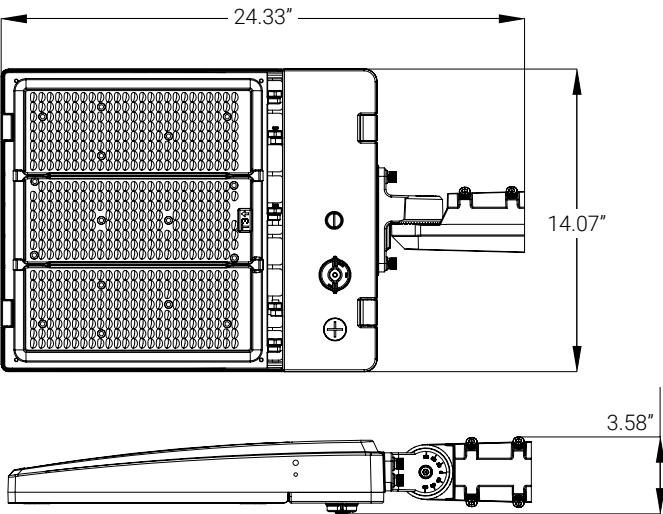


Straight Arm Bracket

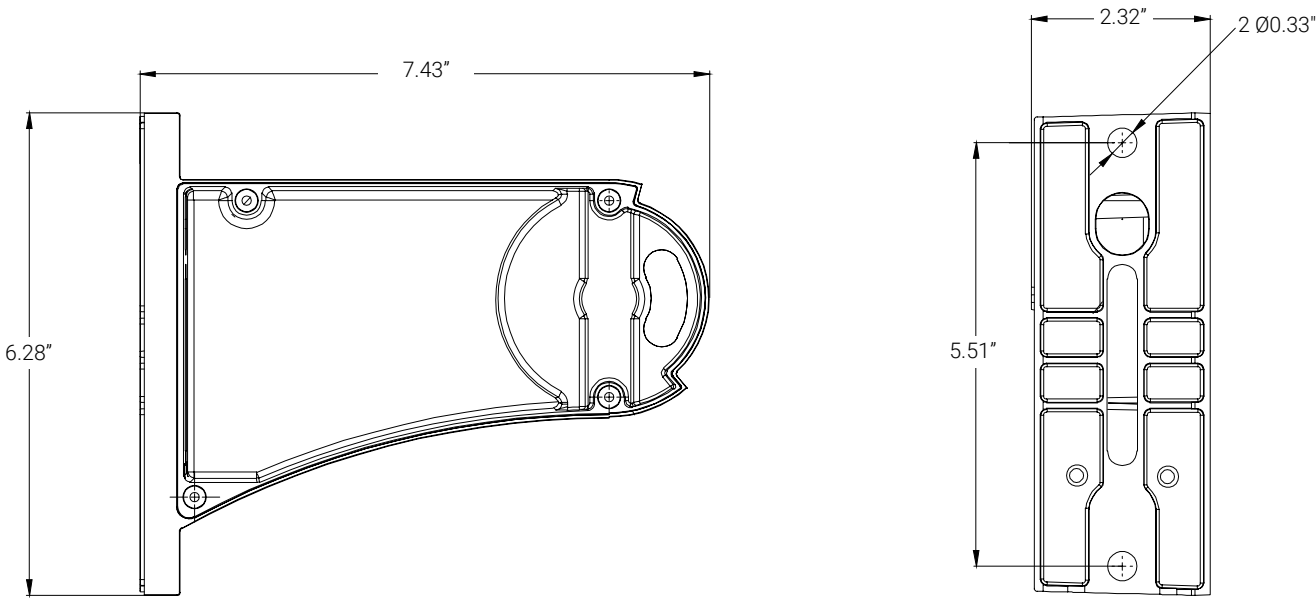


Fixture with Straight Arm


MD

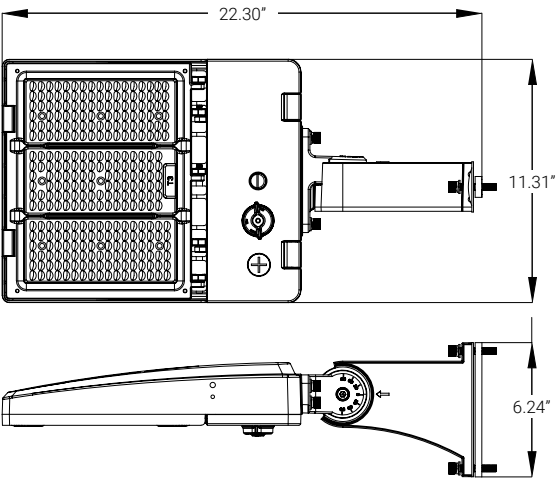



LG

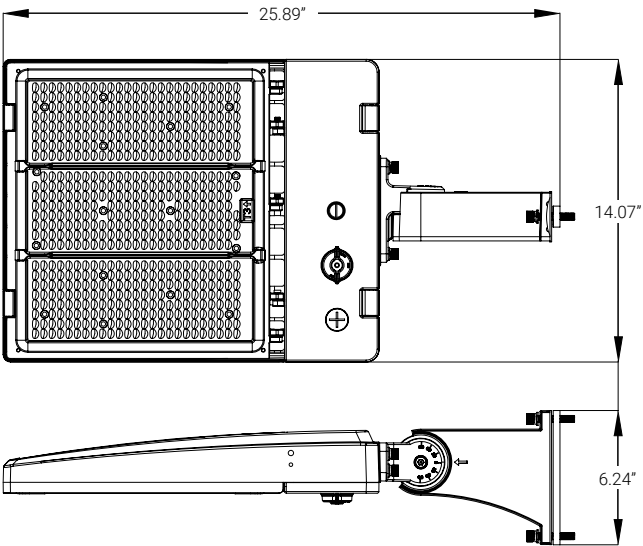

Trunnion (Yoke) Bracket

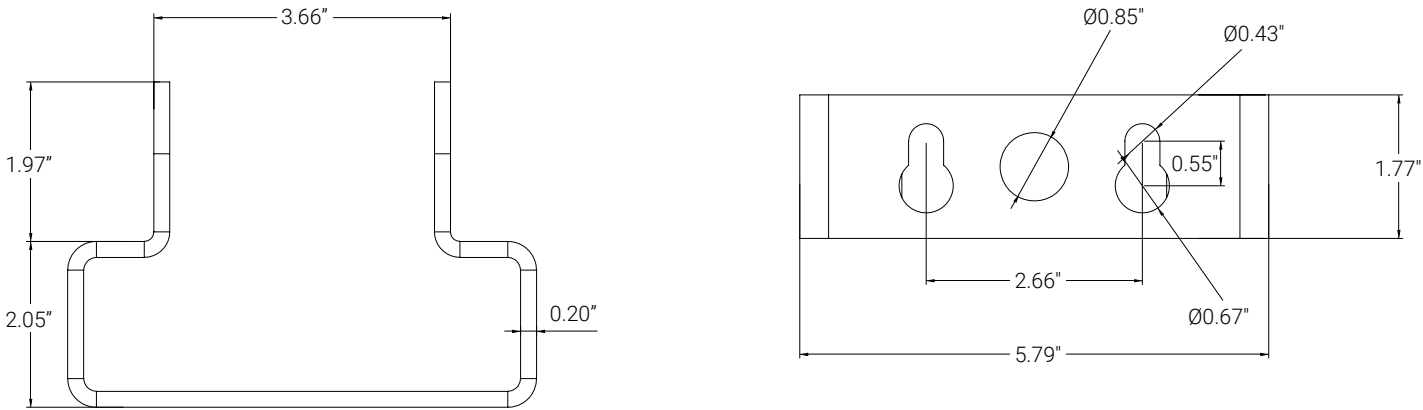

Fixture with Trunnion (Yoke)

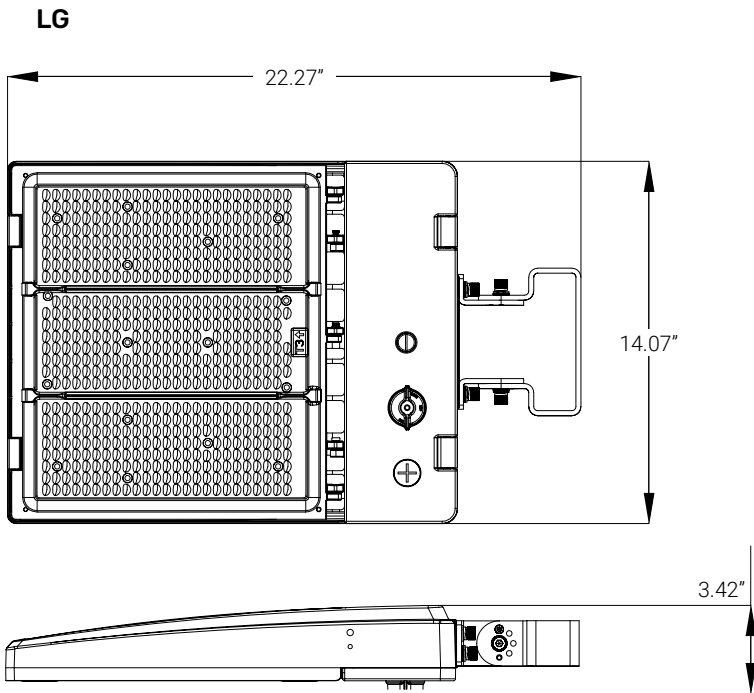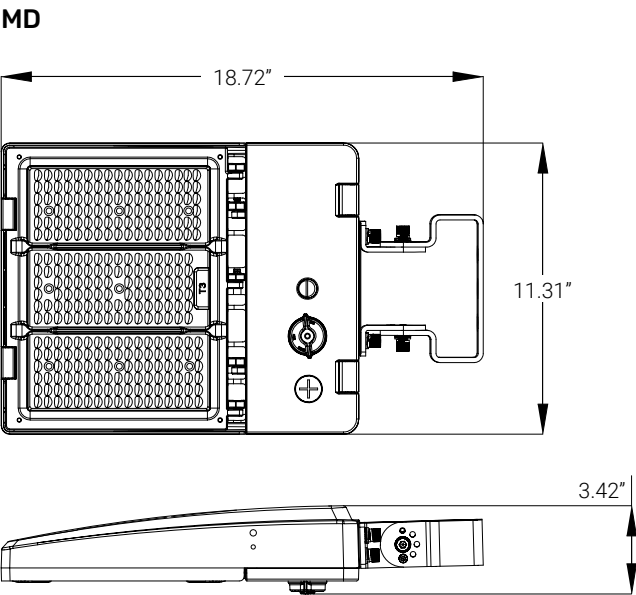

Weights

FIXTURE*	LV	HV
MD	~ 9.3 lbs	~ 10.2 lbs
LG	~13.0 lbs	~13.9 lbs




* Includes bracket base.

Slip Fitter (without bracket base)	~ 0.8 lbs
Straight Arm (without bracket base)	~2.2 lbs
Trunnion (Yoke)	~ 1.7 lbs

Glare Shields




MD: Front / Back Shield

AA1-GSFB-MD

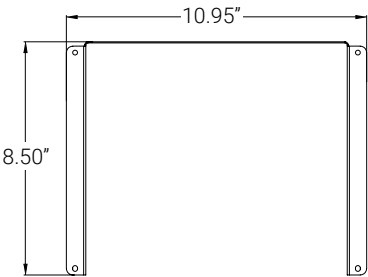




MD: Left / Right Shield

AA1-GSLR-MD






LG: Front / Back Shield

AA1-GSFB-LG

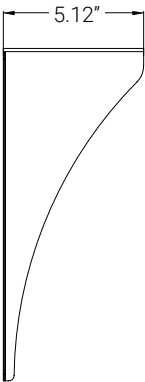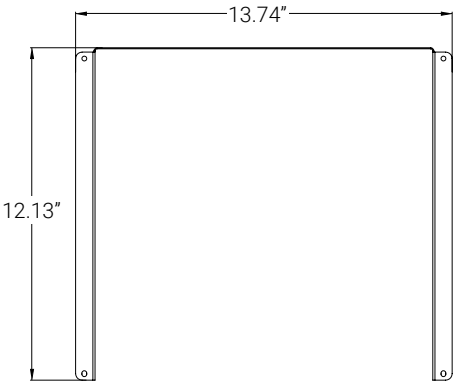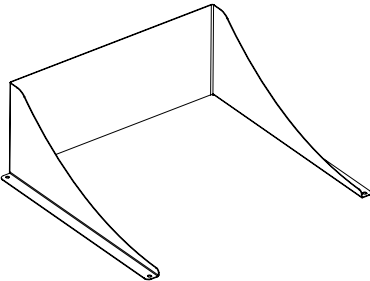

LG: Left / Right Shield





AA1-GSLR-LG

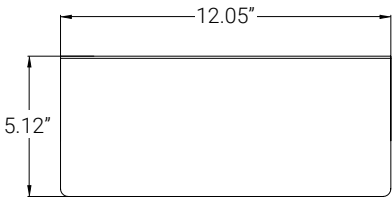

BUG RATINGS

SIZE	T2	T3	T4	T5
MD	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
LG	B4-U0-G3	B4-U0-G3	B4-U0-G4	B5-U0-G4

EPA RATINGS

						
BEAM ANGLE	SIZE					
0°	MD	0.32	0.55	0.65	0.71	0.71
	LG	0.39	0.66	0.81	0.87	0.87
15°	MD	0.37	0.75	0.76	0.93	0.93
	LG	0.65	1.05	1.36	2.45	2.45
30°	MD	0.46	0.97	1.12	1.40	1.40
	LG	1.07	1.83	2.87	3.16	3.16
45°	MD	0.63	1.18	1.29	1.89	1.89
	LG	1.43	2.13	3.02	4.23	4.23
60°	MD	1.30	1.87	2.67	3.73	3.73
	LG	2.08	2.91	4.16	5.49	5.49

EPA ratings measured in square feet.

FOOTNOTES

1. The performance of sensors and lenses is influenced by various factors beyond Linmore's control, including but not limited to environmental conditions, user settings, and proper maintenance. While we provide detailed specifications and guidelines to help optimize performance, we cannot guarantee or be held liable for the performance of sensors or lenses under any particular circumstance(s). Customers are advised to test the products in their specific application environments to ensure suitability for their intended use and are responsible for all sensor and lens selections.