

ESSENTIALS SERIES 4.0

LED High Bay Fixtures

Essentials Series 4.0 provides the highest quality, reliability and performance with extraordinary lumen maintenance and efficacy, delivering superior ROI for your application.

Designed with best-in-class thermal management to perform at ambient temperatures up to 65°C.


APPLICATIONS: Industrial and Commercial Facilities, Warehouses, Manufacturing, Parking Garages, Distribution Centers, Hangars, Natatoriums²⁷ and Indoor Sports.



FEATURES & SPECIFICATIONS

- **Environment:** Dry/Damp, for interior applications (IP4X). Dust-resistant LED modules, dust-proof (IP5X) option available. Wet Location available. Impact protection (IK08).¹⁹
- **Ambient Range Operation:** -40°C up to 65°C (-40°F up to 149°F), depending on product line¹.
- **Heat Sinks:** Extruded aluminum heat sinks provide optimal thermal management, decreasing LED junction temperature and ensuring long life and high efficacy. In addition, we attach the LED boards to the heat sink using a high quality thermally conductive adhesive instead of screws. This promotes long life even at high ambient temperatures.
- **High-Quality Materials:** FR4 PCB is used to limit stress on solder joints by matching coefficient of thermal expansion between the LED and the PCB more closely.
- **Power Supply Access:** Wireway cover is captured and hinged, opening over 120° for hands-free, easy access and quick wiring. Center hole accepting 3/4" stem and also 1/2" KO near top end of wire way.
- **Mounting:** Fixture is cable ready (CRM) and has a center opening to accept a 3/4" stem mount, cable (CRM), HOOK or surface mount options (with optional MBR). MBR reduces ambient range by 5°C when mounted flush to junction box.
- **Lenses:** UV stable polycarbonate clear and aisle or acrylic (PMMA) frosted available.
- **CCT:** 3500K, 4000K and 5000K standard, other CCT available (extended lead time).²
- **Wire Guards:** Optional factory-installed wire guards for the fixture and OCC occupancy sensors are available.

Project Name	
Date	
Cat. Number	
Type	

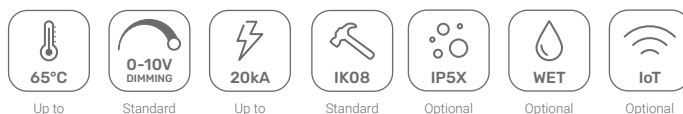

MULTIPLE PATENTS PENDING

- **Warranty:** 10-year standard including guaranteed L70.
- **Rotatable LED Modules:** Field adjustable rotating modules. Easily adjusted outer modules with stops at 45°, 90° and 135°. Factory set at 0°. Allows for customizing light pattern to suit individual situations.^{3,15}
- **Bulk Packaging:** All fixtures come in eco-friendly bulk packaging. Individual boxes are also available.

POWER & CONTROL

- **Power Input:** 120-277V or 347-480 (50/60Hz), Typical, depending on model.
- **Power Factor:** Greater than 0.9 (0.96–0.99 typical).
- **Total Harmonic Distortion:** Less than 20%, 10% typical.
- **UltraLink Bluetooth® Controls:** Advanced wireless controls available. Requires commissioning in the field, contact factory.
- **Occupancy and Dimming Occupancy Sensors:** Optional - factory installed photocell sensors. IR-TEC and Wattstopper available, other options available upon request.
- **Emergency Battery Backup (EMB and EMB2):** EMB produces ~2000 lumens for a minimum of 90 minutes. EMB2 produces ~2200 lumens for a minimum of 90 minutes. EMB has 16 watts output, EMB2 has 20 watts output. EMB factory installation only, not able to be field installed. Available in LV and HV (EMB, M fixtures only)^{1,8,10,15,16,18,25}
- **Surge Protection:** Standard is 6kV for drivers. Additional surge protection is available. All HV orders will have 10kV SRG automatically added.
- **Driver Quick Disconnect:** A Driver Quick Disconnect feature is available as an additional option.

TECHNICAL SPECIFICATIONS

PERFORMANCE LINE: Highest efficacy and longest life. Up to 65°C [149°F]

Lumen Output ⁵	Efficacy	Watts	Frame ⁶	Part Number
8,291	165	50	2MS	ES40P-A1-08K-2MS
13,438	167	81	4MS or 2M	ES40P-A1-13K-4MS [2M]
15,544	165	94	4MS or 2M	ES40P-A1-15K-4MS [2M]
17,818	164	109	4MS or 2M	ES40P-A1-17K-4MS [2M]
21,743	168	129	6MS	ES40P-A1-21K-6MS
24,874	167	149	6MS	ES40P-A1-24K-6MS
31,088	167	186	4M	ES40P-A1-31K-4M
36,044	166	217	4M	ES40P-A1-36K-4M
43,486	168	258	6M	ES40P-A1-43K-6M
49,749	167	298	6M	ES40P-A1-49K-6M
58,933	165	358	6M	ES40P-A1-58K-6M

STANDARD LINE: High efficacy and long life. Up to 55°C [131°F]

Lumen Output ⁵	Efficacy	Watts	Frame ⁶	Part Number
6,453	159	41	2MS	ES40S-A1-06K-2MS
9,822	158	62	2MS	ES40S-A1-09K-2MS
12,280	152	81	2MS	ES40S-A1-12K-2MS
17,295	142	122	4MS or 2M	ES40S-A1-17K-4MS [2M]
20,646	161	128	4MS or 2M	ES40S-A1-20K-4MS [2M]
23,789	157	151	4MS or 2M	ES40S-A1-23K-4MS [2M]
30,969	163	190	6MS	ES40S-A1-30K-6MS
35,394	157	227	6MS	ES40S-A1-36K-6MS
43,277	160	271	4M	ES40S-A1-43K-4M
49,121	156	315	4M	ES40S-A1-49K-4M
73,681	159	465	6M	ES40S-A1-73K-6M

VALUE LINE: Lowest cost per lumen. Up to 45°C [113°F]

Lumen Output ⁵	Efficacy	Watts	Frame ⁶	Part Number
6,135	151	41	2MS	ES40V-A1-06K-2MS ²³
13,699	150	92	2MS	ES40V-A1-13K-2MS
15,378	147	105	4MS or 2M	ES40V-A1-15K-4MS [2M]
27,398	151	181	4MS or 2M	ES40V-A1-27K-4MS [2M]
41,097	151	271	6MS	ES40V-A1-41K-6MS
54,796	154	356	4M	ES40V-A1-54K-4M
70,787	157	455	6M	ES40V-A1-70K-6M

2M model available as a variation of 4MS. Consult factory.

⁴LM-79, LM 80 tests and reports are performed in accordance to IESNA standards, per TM-21. Lumen maintenance in hours (L70 via TM-21) based on 24/7 operation. ⁵Typical (±10%) at 277V (LV), 25°C, 4000K/5000K, Clear Lens, CRI 80+. Lumen Multipliers: 3500K = 0.97; Frosted Lens = 0.98; Aisle Lens = 0.96

LUMEN MAINTENANCE⁴

PROJECTED L70 VIA TM-21 (24/7 OPERATION)

25°C Ambient Temp.	65°C Ambient Temp. ¹
309,000 hours	194,000 hours

Ambient	Year 1	Year 5	Year 10
25°C	99.66%	95.60%	90.76%
45°C	99.51%	94.55%	88.68%
55°C	99.34%	93.81%	87.34%
65°C	99.12%	93.00%	85.88%

Ambient	25°C	35°C	45°C	55°C	65°C
Lumen Multiplier	1.00	0.99	0.98 ⁴	0.98	0.97

PROJECTED L70 VIA TM-21 (24/7 OPERATION)

25°C Ambient Temp.	55°C Ambient Temp. ¹
256,000 hours	184,000 hours

Ambient	Year 1	Year 5	Year 10
25°C	99.60%	94.99%	89.53%
45°C	99.29%	93.63%	87.01%
55°C	99.09%	92.82%	85.55%

Ambient	25°C	35°C	45°C	55°C	65°C
Lumen Multiplier	1.00	0.98	0.97	0.97	X

PROJECTED L70 VIA TM-21 (24/7 OPERATION)

25°C Ambient Temp.	45°C Ambient Temp. ¹
238,000 hours	191,000 hours

Ambient	Year 1	Year 5	Year 10
25°C	99.52%	94.66%	88.92%
45°C	99.19%	93.22%	86.27%

Ambient	25°C	35°C	45°C	55°C	65°C
Lumen Multiplier	1.00	0.98	0.97	X	X

ORDERING EXAMPLES

Base Fixture: ES40P-A1-08K-2MS-50-80-CL-LV-CRM-10V

Base Fixture with Options: ES40P-A1-08K-2MS-50-80-CL-LV-CRM-OCDDIM20-CW-WET-10V

DLC Number: ES40P-A1-08K-2MS-50-80-CL-LV-[xxx]-10V

SELECT ONE				SELECT ONE	SELECT ONE	SELECT ONE	SELECT ONE
Series-Compliance-Lumens-Frame				Color Temp	CRI	Lens	Voltage
ES40S-A1-06K-2MS ^{2,7}	ES40V-A1-15K-4MS ^{2,6,7}	ES40S-A1-30K-6MS ⁷	ES40S-A1-49K-4M	35 ²	80+	CL	LV
ES40V-A1-06K-2MS ^{2,7,23}	ES40P-A1-17K-4MS ^{6,7}	ES40P-A1-31K-4M ⁷	ES40V-A1-54K-4M ^{7,21}	3500K	(Standard)	Clear Lens, Wide Distribution	120-277V
ES40P-A1-08K-2MS ^{2,7}	ES40S-A1-17K-4MS ^{6,7}	ES40P-A1-36K-4M	ES40P-A1-58K-6M ²¹	40	Other CRI available upon request	FR	HV ²⁶
ES40S-A1-09K-2MS ^{2,7}	ES40S-A1-20K-4MS ^{6,7}	ES40S-A1-36K-6MS	ES40V-A1-70K-6M ²¹	4000K		Frosted Lens, Wide Distribution	347-480V
ES40S-A1-12K-2MS ^{2,7}	ES40P-A1-21K-6MS ⁷	ES40V-A1-41K-6MS ^{1,8,20,21}	ES40S-A1-73K-6M ^{7,21}	50		AL	
ES40P-A1-13K-4MS ^{2,6,7}	ES40S-A1-23K-4MS ^{6,7}	ES40P-A1-43K-6M		5000K		Aisle Distribution	
ES40V-A1-13K-2MS ^{2,7}	ES40P-A1-24K-6MS ⁷	ES40S-A1-43K-4M		Other CCT available upon request			
ES40P-A1-15K-4MS ^{2,6,7}	ES40V-A1-27K-4MS ^{6,7}	ES40P-A1-49K-6M					

SELECT ONE	SELECT ONE IF APPLICABLE, IF NONE, LEAVE BLANK AND MOVE TO CORD & PLUG	SELECT ONE IF APPLICABLE, IF NONE, LEAVE BLANK, MOVE TO OPTION	SELECT AS MANY AS APPLICABLE, SEPARATE EACH WITH “-”. IF NONE, LEAVE BLANK, MOVE TO DIMMING	10V		
Mounting	Controls ¹⁵	Cord & Plug – No cord/plug (Standard) ^{10,14}	Option ¹⁰	Dimming		
CRM⁹ Cable-ready (standard) for suspension mounting or 3/4” stem mount MBR^{1,10} Factory installed mounting box and bracket for surface mount applications - adds 1 1/8” to fixture height HOOK¹⁰ Field installed mounting kit, includes hook and one leveling Y-cable. Plate and Hanger mount also available, sold and packaged separately, see Accessories, order as CRM . Other mounting options available, contact factory	ULTRALINK WIRELESS CONTROLS²⁹ ULTRA Linmore UltraLink Bluetooth Mesh Controls. ULTRAHGA Linmore UltraLink Bluetooth Mesh Controls with High-Gain antenna. ULTRAPIR20 Linmore UltraLink Bluetooth PIR sensor, 20’ max mounting height. ULTRAPIR40 Linmore UltraLink Bluetooth PIR sensor, 40’ max mounting height. BASIC CONTROLS¹⁰ OCC8^{10,24} WattStopper OCC Sensor, on/off, w/ photocell, 8’ mounting height. HV only OCDDIM8^{10,11,24} WattStopper OCC Sensor, dimmable, w/ photocell, 8’ mounting height OCC20^{10,24} WattStopper OCC Sensor, on/off, w/ photocell, 20’ mounting height. HV only TOCC20^{10,12,13,24} IR-TEC OCC Sensor, on/off, w/ photocell, 20’ mounting height TOCCDIM20^{10,11,15,24} IR-TEC OCC Sensor, dimmable w/ photocell, LV only, 20’ mounting height OCDDIM20^{10,11,15,24} WattStopper OCC Sensor, dimmable, w/ photocell, 20’ mounting height OCC40^{10,24} WattStopper OCC Sensor, on/off, w/ photocell, 40’ mounting height. HV only TOCC40^{10,12,13,24} IR-TEC OCC Sensor, on/off, w/ photocell, 40’ mounting height TOCCDIM40^{10,11,15,24} IR-TEC OCC Sensor, dimmable w/ photocell, LV only, 40’ mounting height OCDDIM40^{10,11,15,24} WattStopper OCC Sensor, dimmable, w/ photocell, 40’ mounting height Other control options available, contact factory	6’ 18AWG CORD, WHITE WITH THE FOLLOWING- CW^{10,14} Cord, 15A, 3-wire, no plug DW^{10,14} Dimming cord, 15A, 5-wire, no plug C515^{10,14} Cord, 15A, straight plug 120V (5–15P) CL515^{10,14} Cord, 15A, locking plug 120V (L5–15P) CL715^{10,14} Cord, 15A, locking plug 277V (L7–15P) CL720^{10,14} Cord, 20A, locking plug 277V (L7–20P) CL2420^{10,14} Cord, 20A, locking plug 347V (L24–20P) CL820^{10,14} Cord, 20A, locking plug 480V (L8–20P) CACS^{10,16,22} 6’ SO Cord whip, ACS Locking System, 277/480V, 2-wire w/ ground CACSMC^{10,16,22} 6’ MC Cable, ACS Locking System, 277/480V, 2-wire w/ ground Other cord options available, contact factory	10’ 18AWG CORD, WHITE WITH THE FOLLOWING- 10CW^{10,14} Cord, 15A, 3-wire, no plug 15’ 18AWG CORD, WHITE WITH THE FOLLOWING- 15CW^{10,14} Cord, 15A, 3-wire, no plug 15DW^{10,14} Dimming cord, 15A, 5-wire, no plug 15C515^{10,14} Cord, 15A, straight plug 120V (5–15P) 15CL515^{10,14} Cord, 15A, locking plug 120V (L5–15P) 15CL715^{10,14} Cord, 15A, locking plug 277V (L7–15P) 15CL720^{10,14} Cord, 20A, locking plug 277V (L7–20P) 15CL2420^{10,14} Cord, 20A, locking plug 347V (L24–20P) 15CL820^{10,14} Cord, 20A, locking plug 480V (L8–20P) Other cord options available, contact factory	EMB^{1,8,10,15,16,18,25} Emergency battery back-up. Adds 1.25” to fixture height EMB2^{1,8,10,15,16,18,25} High lumen emergency battery back-up. LV only. Adds 1.25” to fixture height QDC^{10,15} Driver Quick Disconnect SRGOFF^{10,15,16,20,26} Fixture installed 20kA Surge Suppression Device, Fails to OFF SRG^{10,15,26} Fixture installed 10kA Surge Protector fails to ON BOX¹⁰ Individual box packaging available CTRW^{7,10} Counter Balance Weight for MBR and stem mounting (certain fixtures only, see notes for applicable models, contact factory)	WG^{3,10} Fixture Wire Guard CTOPEND^{1,8,10,13} Cord mounted on top edge of wireway WET^{3,10,15,16} Wet location rated. Only available with no cord or CW or DW cord option. DUST^{3,10} Dust-proof (IP5X) INDR^{1,3,10,15} LED modules factory inverted for Indirect lighting GTD^{10,16,21} Generator transfer device R45²⁸ Both outer LED modules rotated 45° R90²⁸ Both outer LED modules rotated 90° R135^{1,28} Both outer LED modules rotated 135°	10V 0-10V Interface (Standard)

When submitting for utility incentives and rebates, please use catalog numbers. When ordering OPTIONS, separate each option with a "-". Catalog number always ends with dimming selection "10V"

ACCESSORIES

Must be ordered separately. Packaged separately.

FIXTURE ACCESSORIES

Part Number	Description
SAFETYCABLE	Kit includes (one) 5 ft. aircraft cable with single snap hook, L-bracket, screw and nut. For use with HOOK, MBR, PLATE MOUNT or stem mounting options.
CABLEKIT	Kit includes (two) 10 ft. aircraft "Y" cables and snap hooks (one pair).
HANGER	Kit includes two wire V hangers. Order fixture with CRM mounting option.
PLATE	Kit includes hanging plate with mounting hole for 3/4" conduit and (four) each 5 ft. aircraft cables and snap hooks. Order fixture with CRM option.
OWG	Wire guard for occupancy sensors, field install. Shipped in separate box.
REPLACEMENT POWER SUPPLY	Available upon request. Contact factory for details.

BASIC CONTROLS

OCCDIMPROG	Handheld wireless programmer for setup OCCDIMXX dimmable occupancy sensors. Required with OCCDIM8, OCCDIM20 and OCCDIM40 selection.
TOCCDIMPROG	Handheld wireless programmer for setup TOCCDIMXX dimmable occupancy sensors. Required with TOCCDIM20 and TOCCDIM40 selection.

ULTRALINK WIRELESS CONTROLS

Part Number	Description
ULTRAGATEWAY	UltraLink Bluetooth Wireless Gateway, Long Range Bluetooth Mesh, 800 MHz ARM with 512 MB RAM, 8 GB Storage, Hardware Security Module, Encrypted File System, Secure Boot, Interior Installation Only.
ULTRASW	UltraLink Bluetooth Wireless Wall Switch, Self-Powered, Single Rocker, On/Off/Dim.
ULTRASW-DR	UltraLink Bluetooth Wireless Wall Switch, Self-Powered, Double Rocker, On/Off/Dim/Scenes.
ULTRASW-AC	UltraLink Bluetooth Wireless Wall Switch, AC-Powered 120-277V, Single Rocker, On/Off/Dim.
ULTRASW-PIR-AC	UltraLink Bluetooth Wireless Wall Switch with PIR Sensor, AC-Powered 120-277V, Single Rocker, On/Off/Dim.
ULTRASW-4B-AC	UltraLink Bluetooth Wireless Wall Switch with 4 Buttons, AC-Powered 120-277V, Single Gang, On/Off/Dim/Scenes.
ULTRATIME-BAT	UltraLink Bluetooth Time-Keeping Battery Backup includes an outdoor-rated enclosure, a high-gain antenna and a backup battery. For use to keep time during a power outage and for in-node scheduling.
ULTRAFACT	UltraLink Factory Activation, zone identification on packaging. For use with all Bluetooth ready fixtures and systems.
ULTRADESIGN	UltraLink System Design Services.
ULTRADASH	UltraLink Dashboards for energy use, energy heat mapping, and occupancy heat mapping. Gateway (ULTRAGATEWAY) required, sold separately.

LISTINGS & CERTIFICATIONS

- ETL listed (UL 1598) - RoHS Compliant
- DesignLights™ Consortium Listed
- EMI: Title 47 CFR 15 Class A and ICES-005 - CSA 22.2


END NOTES

1. MBR, 135° module setting and INDR fixtures max. temp 5°C less, typical. EMB fixtures 32°F to 113°F (0°C to 45°C). EMB for ES40V-A1- 41K-6MS fixtures 32°F to 95°F (0°C to 30°C) and not available with EMB and OCC sensor. HV EMB not available on Short Module (MS) fixtures. HV EMB Max ambient 35°C. HV EMB includes step-down transformer. Temperatures below -20° have limited switch cycles, consult factory. Generator Transfer Device ambient range 0°C to 50°C (32°F to 122°F). EMB and EMB2 not available with CTOPEND. EMB factory installation only, not able to be field installed.
2. Fixtures not DLC listed: All 3500K CCT models and fixtures below. ES40S-A1-06K-2MS-40-80-CL, ES40S-A1-06K-2MS-50-80-CL, ES40S-A1-06K-2MS-40-80-FR, ES40S-A1-06K-2MS-50-80-FR, ES40S-A1-06K-2MS-40-80-AL, ES40V-A1-06K-2MS-40-80-CL, ES40V-A1-06K-2MS-50-80-CL, ES40V-A1-06K-2MS-40-80-FR, ES40V-A1-06K-2MS-50-80-FR, ES40V-A1-06K-2MS-40-80-AL, ES40P-A1-08K-2MS-40-80-CL, ES40P-A1-08K-2MS-50-80-CL, ES40P-A1-08K-2MS-40-80-FR, ES40P-A1-08K-2MS-50-80-FR, ES40P-A1-08K-2MS-40-80-AL, ES40S-A1-09K-2MS-40-80-CL, ES40S-A1-09K-2MS-50-80-CL, ES40S-A1-09K-2MS-40-80-FR, ES40S-A1-09K-2MS-50-80-FR, ES40S-A1-09K-2MS-40-80-AL, ES40S-A1-12K (all models), ES40P-A1-13K (all models), ES40V-A1-13K (all models), ES40P-A1-15K-4MS-40-80-FR, ES40P-A1-15K-4MS-50-80-FR, ES40V-A1-15K-4MS-40-80-FR, ES40V-A1-15K-4MS-50-80-FR, ES40V-A1-15K-4MS-40-80-AL, ES40V-A1-15K-4MS-50-80-AL. 2M variations of the 4MS fixtures listed above are also not DLC listed.
3. Rotatable Modules will rotate when wire guards are installed. Rotatable Modules will function in INDR mode on 4M, 4MS, 6M and 6MS only. With WET and DUST options, the Rotatable Modules are not able to be set in the field; if custom settings are required, please consult factory.
4. LM-79, LM 80 tests and reports are performed in accordance to IESNA standards, per TM-21. Lumen maintenance in hours (L70 via TM-21) based on 24/7 operation.
5. Typical (±10%) at 277V (LV), 25°C, 4000K/5000K, Clear Lens, CRI 80+. Lumen Multipliers: 3500K = 0.93 ; Frosted Lens = 0.98 ; Aisle Lens = 0.96.
6. All 4MS units can be configured in the 2M (longer) size for additional cost, please contact factory.
7. Counterweight is available for fixtures with odd number of power supplies which may not hang level from a non-rigid, single point mount. Models affected are:
 ES40S-A1-06K-2MS, ES40V-A1-06K-2MS, ES40P-A1-08K-2MS, ES40S-A1-09K-2MS, ES40S-A1-12K-2MS, ES40P-A1-13K-4MS, ES40V-A1-13K-2MS, ES40P-A1-15K-4MS, ES40P-A1-17K-4MS, ES40S-A1-17K-4MS, ES40S-A1-20K-4MS, ES40P-A1-21K-6MS, ES40S-A1-23K-4MS, ES40V-A1-27K-4MS, ES40P-A1-24K-6MS, ES40S-A1-30K-6MS, ES40P-A1-31K-4M, ES40V-A1-54K-4M and ES40S-A1-73K-6M, ES40S-A1-36K-6MS.
8. ES40V-A1-41K-6MS not available with CTOPEND. HV EMB not available on ES40V-A1-41K-6MS. When ordered with EMB it MUST have a cord selected. When ordered with any OCC sensor this unit will have the MBR mounting option only. This unit is not available with EMB and OCC sensor together. Even with the MBR mounting option these may be cable mounted.
9. Optional CABLEKIT ordered separately. See ACCESSORIES.
10. Optional add-on. See price list for pricing.
11. Wireless programmer required for final field setup. See ACCESSORIES.
12. 120-277V only.
13. Fixtures ordered with any cord option and an IR-TEC OCC Sensor will have the cord exit from the fixture from the center of the fixture only. CTOPEND not available.
14. All cords are 18/3 AWG, 600V and white. DW and 15DW are 18/5, 600V and white.
15. WET rating covers the fixture and OCCDIM20/40 only (if ordered as an option). It does NOT include the following sensors or controls: CTRLR, OCC, TOCC, TOCCDIM, ULTRAHGA, ULTRAPIR20 or ULTRAPIR40. QDC and EMB/EMB2 not available with WET option. Not compatible with INDR. SRG and SRGOFF are IP66 and will work with WET option when used with approved, WET LOCATION connectors (supplied by other).
16. Consult factory for orders requiring EMB, EMB2, WET and CTRLR. GTD, SRGOFF, CACS and CACSMC may have extended lead times.
17. CTRLR includes 5 wires, capped off inside of fixture for use with field installed controls.
18. Dimensions listed are for the fixture only. See dimensional drawings for measurements with mounting hardware. Weights are approximate and vary by model, if weight is a concern, please contact factory. Weight changes when battery backup is added.
19. Clear and Aisle lens only and all fixtures including a wire guard.
20. 20kA Surge suppression device in which, when triggered, the fixture will fail in the "Off" mode (fixture will not illuminate). Not available with ES40-A1-41K-6MS.
21. Generator Transfer Device. Ambient range is 0°C to +50°C (32°F to 122°F). Provides full fixture output on generator power for all fixtures except ES40V-A1-54K-4M, ES40P-A1-58K-6M, ES40V-A1-70K-6M, which will have 50% output and ES40S-A1-73K-6M, which will have 60% output. The GTD is not available on the ES40V-A1-41K-6MS. GTD is available on LV only; not available on HV fixtures. Voltage must be specified as either 120V or 277V. Requires separate line for GTD to function. Available cord options DW and 15DW only.
22. American Cable Systems connector for modular wiring. The connector is 277/480V, 2-wire with Ground. If a different connector is required, please contact factory with details of the installation.
23. ES40V-A1-06K-2MS Max ambient is 55°C.
24. Sensor settings from factory:
 OCC - If no movement for 15 mins, OFF (WS Factory Settings)
 TOCC - If no movement for 10 mins, OFF (IR-TEC Factory Settings)
 OCCDIM - If no movement for 5 mins, dim to 10%, if no movement for 60 mins, OFF (WS Factory Settings)
 TOCCDIM - If no movement for 10 mins, dim to 30%, if no movement for 10 minutes, OFF (IR-TEC factory settings).
25. When using EMB or EMB2, ES40V-A1-06K-2MS, ES40V-A1-15K-4MS (2M) and ES40S-A1-17K-4MS (2M) have ~74% of rated output in battery powered mode.
26. SRG (10kA protection) is standard option on all HV fixtures. Controls and sensors should have optional SRG or SRGOFF added. They are not protected by the internal surge suppression provided by the driver.
27. With WET option only.
28. Can only select one rotation angle per fixture. Both outer LED modules are rotated at the same angle. Not compatible with INDR option.
29. ULTRA requires separate commissioning and ACCESSORIES, contact factory.

DIMENSIONS & DRAWINGS

See End Note #18.

Bottom View

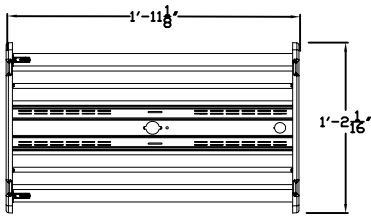

Model	Length (in)	Width (in)	Height (in)	Weight (lb)
2MS	23.1	8.28	2.1	~8
4MS	23.1	11.2	2.1	~10
6MS	23.1	14.1	2.1	~14
2M*	43.72	8.28	2.1	~16
4M	43.72	11.2	2.1	~18
6M	43.72	14.1	2.1	~20.6


***2M available as a variation of 4MS.** Consult factory.

MBR and EMB mounting options adds 1 1/8" to fixture height.


MBR on MS (short) fixtures with EMB adds 1 1/4" to fixture height to fixture height.

Weights are approximate and vary by model, if weight is a concern, please contact factory.


Cable Ready Mount (CRM)

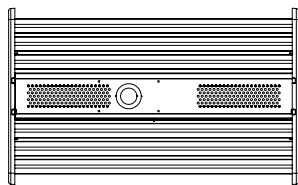

TOP VIEW




END VIEW




SIDE VIEW


Fixture Mounting Box (MBR)

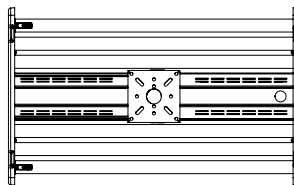

TOP VIEW




END VIEW




SIDE VIEW


Fixture Mounting Box (EMB)

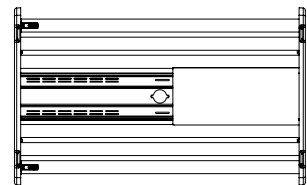

TOP VIEW




END VIEW




SIDE VIEW

Surface Mount Option
(when ordering EMB with MBR)



END VIEW











SIDE VIEW









LIGHT DISTRIBUTION

At Different Module Angles with Clear Lens









2M and 2MS




4M and 4MS



6M and 6MS



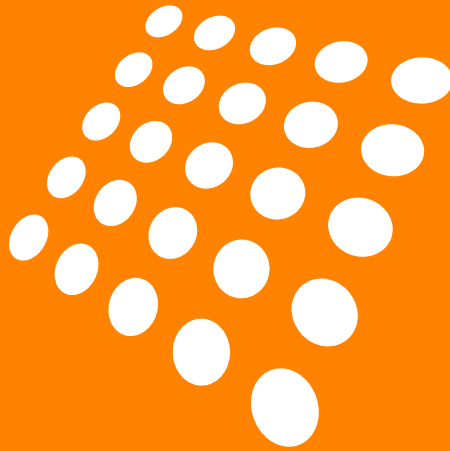

LinmoreLED®

ULTRA PERFORMANCE LIGHTING

Linmore LED Labs, Inc.

559.485.6010
info@linmoreled.com
linmoreled.com

Headquarters
2360 S Orange Ave
Fresno, CA 93725-1014

Engineering & Innovation Hub
710 Century Pkwy
Allen, TX 75013

All specifications subject to change without notice. Please see linmoreled.com for latest information. All values are typical or design values and series averages. Actual performance may differ as a result of end-user environments and applications. Consult Linmore LED with specific inquiries. Copyright © 2023, Linmore LED. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Linmore LED.