


REC SERIES SPECIFICATIONS

An extremely versatile high-powered monopoint LED retrofit for commercial recessed or can lighting: malls, airports, convention arenas, stage, auditorium, and much more. 20, 45, & 90W units mount to 0.80 aluminum adapter plates that have been custom cut to fit your fixture. Reflectors are available in Wide (W), Medium (M), Narrow (N), and Very Narrow (VN), for low to high heights.



Polar Candela Distribution

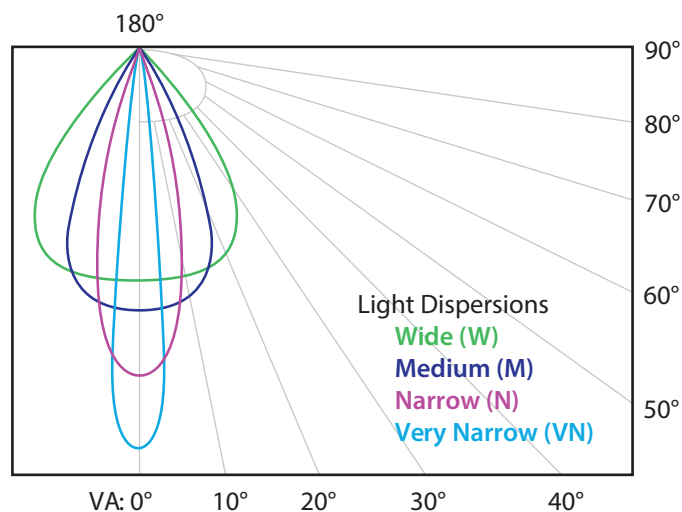

Specifications

Color Temperature	2700K, 3000K, 3500K, 4000K & 5000K
Warranty	10 Years on LEDs, 5 Years on drivers
Color Rendering Index (CRI)	2700 thru 4000: 83+ 5000: 92+
Lifetime (L70)	>250,000 Hours
LED Source	Bridgelux Vero Series
Power Supply	Inventronics 0-10V, 120-277VAC (480V optional), 50/60Hz dimming driver with a -35 C (-30 F) to 70 C (158 F) ambient operating temperature range. 5 year warranty Compliance: ETL, UL 1598, 1598B, 1598C

Model	Input	Delivered lm / w	Delivered Lumens	HID eq	Max Amps	PF @ 277V	THD 277V	# of LED Arrays	Heat Sink Diameter
REC-20W-40K	21	139	2919	100MH	0.21	0.91	13%	1	3.75"
REC-45W-40K	45	110	4950	175MH	0.45	0.91	13%	1	5.75"
REC-90W-40K	90	114	10260	250-400MH	0.90	0.91	13%	1	7.75"