

ULPLUS-BK-EZ10

EZ-Connect™ UltraLink+ Wireless Receiver and Fixture Controller



The ULPLUS-BK-EZ10 is a Bluetooth NLC Wireless Receiver and Fixture Controller for fixtures that don't require motion sensors. It receives instructions based on motion, daylight, switching, or scheduled events from other sensors, switches and/or gateways through the Bluetooth mesh network and controls the fixture accordingly. Rated for wet and cold locations, it can be field installed in fixtures equipped with an EZ-Connect™ receptacle with Twist Lock System. It connects via Bluetooth and can be accessed with the UltraLink+ web portal or mobile app for setup and configuration.

TECHNICAL SPECIFICATIONS¹

- **Construction:** Black Polycarbonate.
- **Connection Method:** EZ10 (Compatible with EZ-Connect™ Receptacles with Twist Lock System).
- **Input Voltage:** 12-24V DC.
- **Current Consumption:** >50mA.
- **Standby Power:** ≤ 0.5W.
- **Control Output:** 0-10V, 25mA.
- **Operating Temperature Range:** -20°C to +60°C (-4°F to +140°F).
- **Max Bluetooth Range:** 200ft (60m) line of sight.

LISTINGS

- FCC, UL, DLC, RoHS, IP65.
- Conforms with DLC NLC5 Cybersecurity Standards.

FEATURES


- EZ-Connect™: installs in seconds without tools or wiring.
- Programmable Settings include time delays and brightness and can be set through the UltraLink+ mobile app.
- Advanced Functionality such as energy monitoring, and demand response available with the optional UltraLink+ Dashboard.
- Magnetic Reset (touch the top part of the sensor for 5s).
- Integrated Antenna.
- Suitable for Indoor and Outdoor use.
- Mobile app available for iOS and Android devices.



ORDERING



Part Number	Description
ULPLUS-BK-EZ10	UltraLink+ Bluetooth NLC Wireless Receiver and Fixture Controller, Black Color, EZ-Connect™ Twist Lock System, IP65, BubblyNet Firmware. Field installed.

CONNECTION DIAGRAM

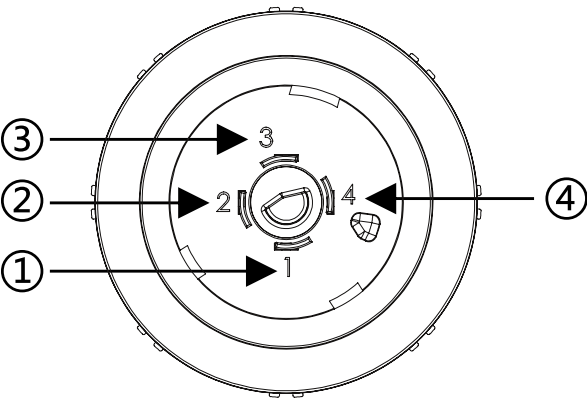

Port 1	12-24V DC
Port 2	GND/DIM-
Port 3	DIM+
Port 4	NC

DIMENSIONS & DRAWINGS

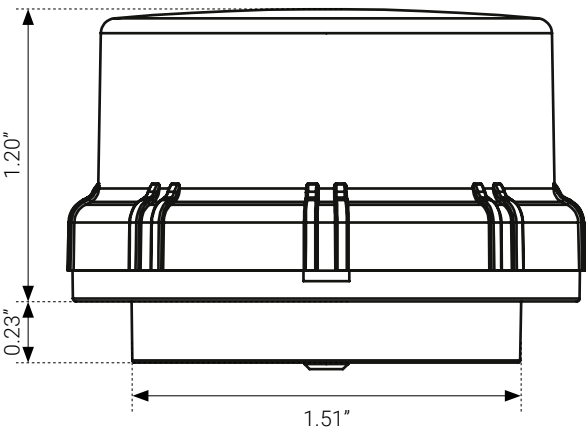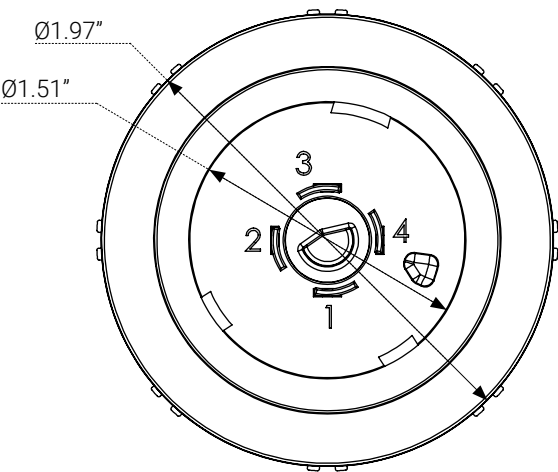

FOOTNOTES

1. The performance of this product is influenced by various factors beyond Linmore LED's control, including but not limited to environmental conditions, user settings, and proper maintenance. While we provide detailed specifications and guidelines to help optimize performance, we cannot guarantee or be held liable for its performance under any particular circumstance(s). Customers are advised to test the products in their specific application environments to ensure suitability for their intended use.

Updated: 2025/07/18