



# ULTRAPIR-WH-EZ40

## EZ-Connect™ UltraLink Wireless Fixture Controller with PIR and Daylight Sensors



The ULTRAPIR-WH-EZ40 is a Bluetooth NLC Fixture Controller with Passive Infrared and Daylight Sensors suitable for up to 13' Mounting Heights. It provides automatic On/Off/Dim control based on motion and/or daylight levels. This sensor detects motion by receiving infrared radiation (heat) from people, animals, or objects within its field of view. Rated for indoor locations, it can be field installed in fixtures equipped with an EZ-Connect™ receptacle with Snap-in System. It connects via Bluetooth and it can be accessed with the UltraLink web portal or iOS app for setup and configuration.

### TECHNICAL SPECIFICATIONS<sup>1</sup>

- **Construction:** White Polycarbonate.
- **Sensing Technology:** Passive Infrared (PIR).
- **Connection Method:** EZ40 (Compatible with EZ-Connect™ Receptacles with Snap-in System).
- **Input Voltage:** 10-14V DC.
- **Current Consumption:** >50mA.
- **Control Output:** 0-10V, 25mA.
- **Operating Temperature Range:** -20°C to +60°C (-4°F to +140°F).
- **Max Mounting Height:** 13ft (4m).
- **Max Sensor Range:** 30ft (9m) radius.
- **Max Bluetooth Range:** 200ft (60m) line of sight.

### LISTINGS

- FCC, UL, DLC, RoHS, IP20.
- Conforms with DLC NLC5 Cybersecurity Standards.

### FEATURES


- EZ-Connect™: installs in seconds without tools or wiring.
- PIR Detection with 360° Coverage Pattern, best suited for indoor or outdoor areas with a clear line of sight.
- Integrated Daylight Sensor for Daylight Harvesting.
- LED Motion Indicator.
- Programmable Settings include time delays and brightness and can be set through the UltraLink iOS app.
- Advanced Functionality such as energy monitoring, and demand response available with the optional UltraLink Dashboard.
- Magnetic Reset (touch the top part of the sensor for 5s).
- Integrated Antenna.
- Suitable for Indoor use.




ORDERING

Part Number	Description
ULTRAPIR-WH-EZ40	UltraLink Bluetooth NLC Wireless Fixture Controller with PIR Occupancy and Daylight Sensor, White Color, EZ-Connect™ Snap-in System, 13' Max Mounting Height, IP20, Silvoir Firmware. Field installed.
SEN-PROG	Infrared Remote Programmer. Only required to change sensor's detection sensitivity until future firmware update of the UltraLink app.


CONNECTION DIAGRAM

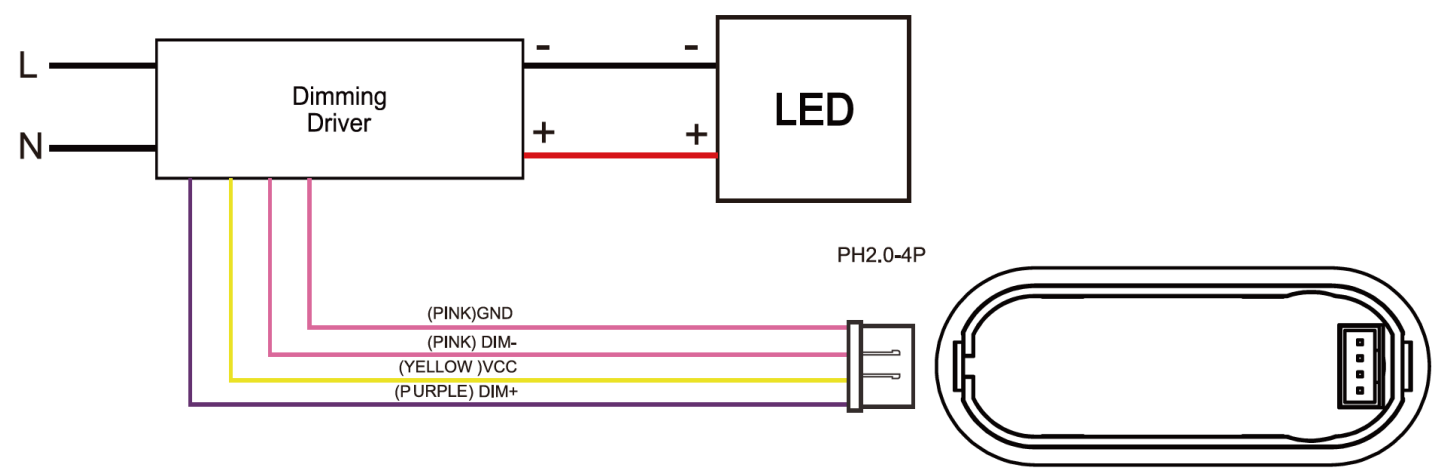

SENSOR COVERAGE

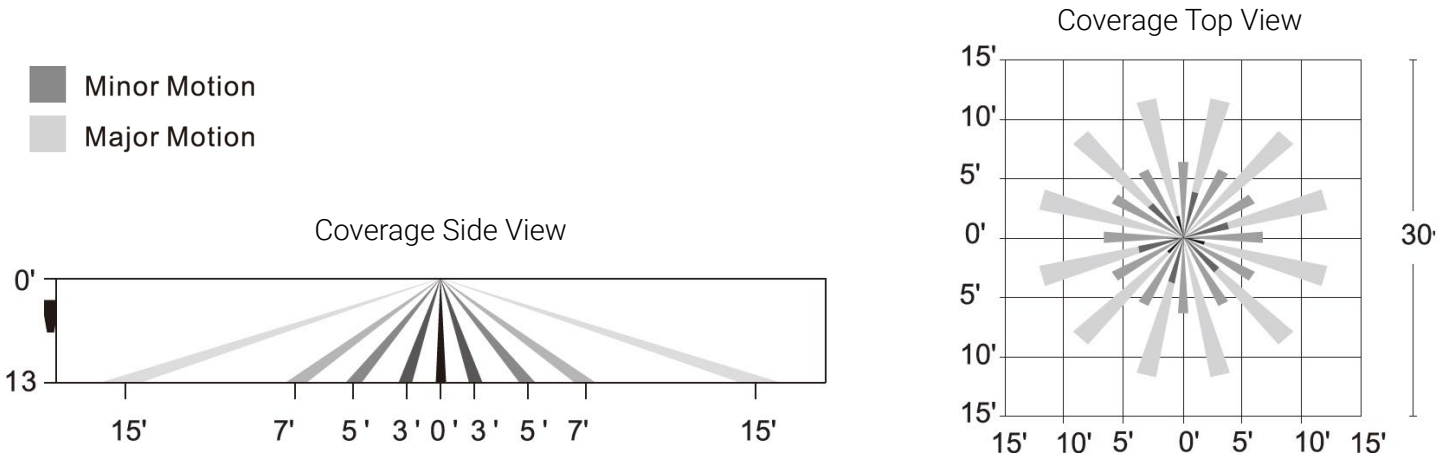

## DIMENSIONS & DRAWINGS

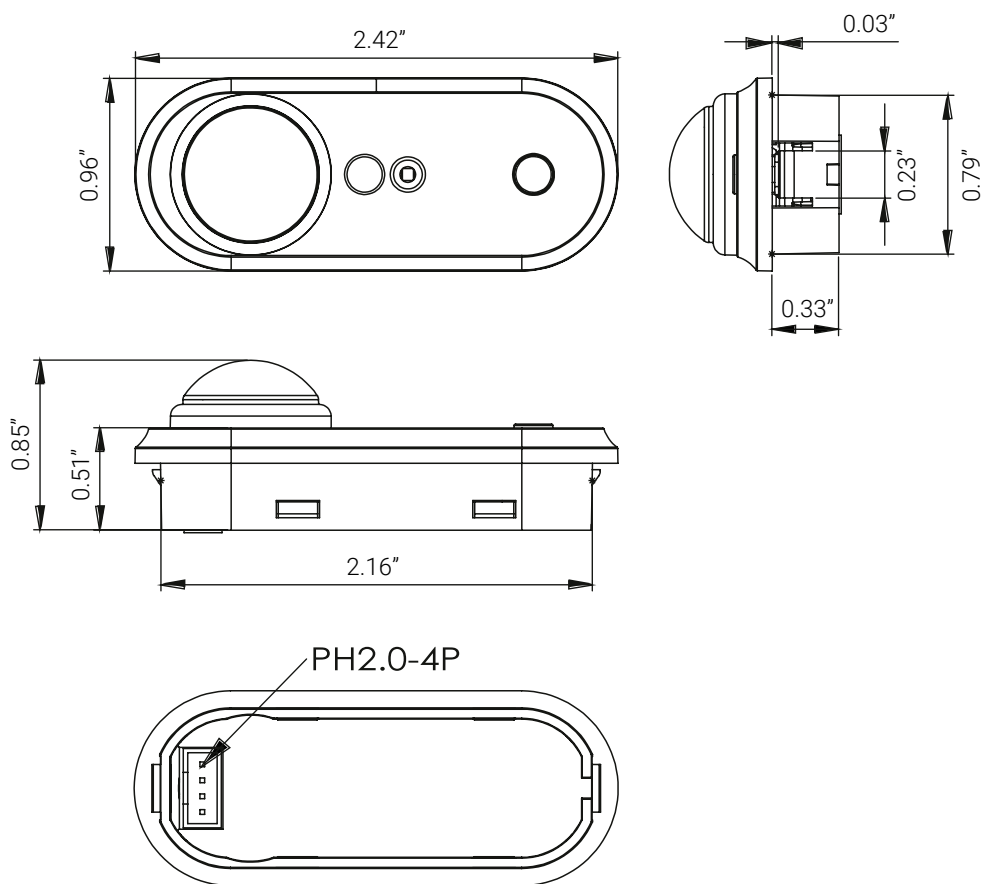

## FOOTNOTES

1. The performance of sensors and lenses is influenced by various factors beyond Linmore LED's control, including but not limited to environmental conditions, user settings, and proper maintenance. While we provide detailed specifications and guidelines to help optimize performance, we cannot guarantee or be held liable for the performance of sensors or lenses under any particular circumstance(s). Customers are advised to test the products in their specific application environments to ensure suitability for their intended use and are responsible for all sensor and lens selections.

Updated: 2025/03/07

### Linmore LED Labs, Inc.

2360 S Orange Ave, Fresno, CA 93725 | 559 485 6010 | [info@linmoreled.com](mailto:info@linmoreled.com) | [linmoreled.com](http://linmoreled.com)



UltraLink is a brand of Linmore LED. All specifications are subject to change without notice. Please visit [linmoreled.com](http://linmoreled.com) for latest information. All values are typical or design values. Actual performance may differ as a result of end-user environments and applications. Consult Linmore LED with specific inquiries. Copyright © 2025, Linmore LED Labs, Inc. All rights reserved.